





Pliers for the automotive trade

An everyday challenge for motor mechanics is that ever more components are installed in an ever smaller space in the engines of modern vehicles. In order to be able to work quickly and reliably despite this lack of space, it is important to have the right tool to hand. Pliers from KNIPEX are impressive because even with the small models, they require little manual force for a highly effective result. The huge breadth of the range, comprising over 80 different models of circlip pliers alone, is a big advantage for the motor trade.

The KNIPEX range has indispensable standard and special pliers for all work in the vehicle. KNIPEX offers various models of special pliers to open and close the numerous hose connections in the engine, on CV boots, rubber gaiters, cooling hoses or bypass pipes.

Spring hose clamp pliers grip standard clamps, space-saving clamps, wire clamps and spring band clamps with a nominal size of up to 70 mm as are frequently used on radiator hoses, firmly and securely. As a result of their compact dimensions and the jaw inserts that can be rotated under load, clamps can be easily accessed even in confined spaces. Click clamps, e.g. on bypass pipes, are sealed quickly and pressure tight using the hose clamp pliers. The slim head of the pliers ensures good accessibility, rotating jaw inserts enables them to be applied flexibly from diverse angles.

KNIPEX has developed the ear clamp pliers for the professional crimping of ear clamps that are often to be found on CV boots and rubber gaiters; their jaws have been designed specifically for the reliable assembly of 1-ear and 2-ear clamps.

Discover your new KNIPEX pliers for the motor trade in this brochure!

SYMBOLS



half-round jaws

round jaws

flat and pointed jaws

box-joint

bolted joint

smooth gripping surfaces

knurled gripping surfaces

cross-hatched, knurled gripping surfaces

with opening spring



with lead catcher





centre cutter



cutting edges with bevel cutting edges with small



bevel cutting edges with very small bevel



cutting edges without bevel



for flush cut of soft



New Article

materials



electrostatic discharging, dissipative



electronics



VDE-tested, also in compliance with GPSG insulated according to IEC 60900, usable up to 1000 V AC / 1500 V DC



☆ 1000 V

conforms to a European directive



mechanically tested in accordance with the equipment and product safety act



WEEE marking (Waste Electrical and Electronic quipment Directive



weight



length



soft wire



medium hard wire



hard wire piano wire



Cu- + Al-multi-conductor cable, solid and multistranded



iron



ribbon cable

wire rope




steel wire armoured cable (SWA)



Further details and explanations can be found on the final pages.

New Products 2018

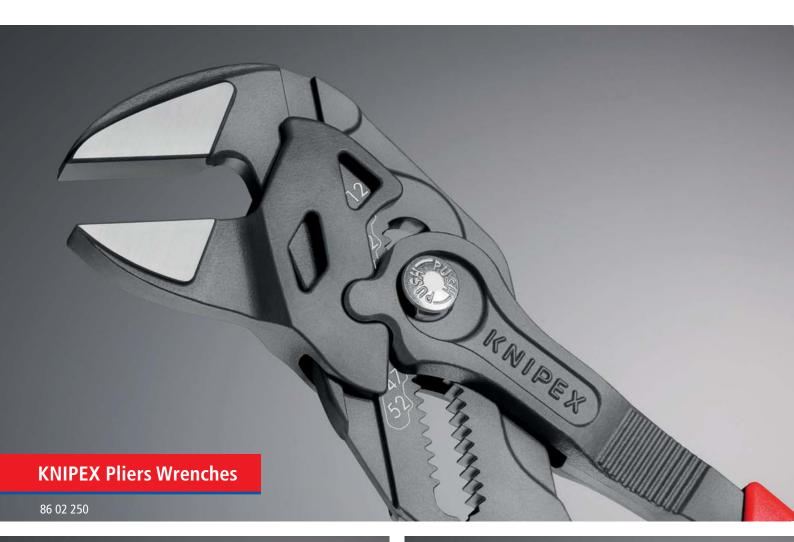





Increased gripping capacity due to two additional setting positions: flexible gripping of all widths across flats up to 52 mm 15 % less weight with the same stability


- > Replaces a whole set of spanners metric and imperial
- > Even easier to use due to considerably reduced weight, fluted pliers handle and slim jaw profile with undercut
- > Work directly on chrome: zero backlash jaw pressure prevents damage to edges of sensitive components
- > Reliable catching of the hinge bolt: no unintentional shifting
- > Lever transmission greater than 10:1 for strong gripping power
- > Chrome vanadium electric steel, forged, oil hardened





Opening width lasered onto the pliers head (metric on the front and imperial on the back)


Article No.	EAN 4003773-	Adjustment positions	Inch	mm	4−→ mm
86 01 250 N	082385	19	2	52	250
86 02 250 N	082392	19	2	52	250
86 06 250 N	082408	19	2	52	250

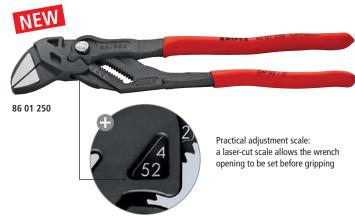



86 02 250



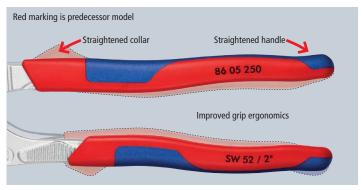

Ergonomic and "pocket friendly" thanks to multi-component grip

KNIPEX Cobra®-Set 5-piece

00

- > Tool roll made of hard-wearing polyester fabric
- > With hook and loop fastener
- > Equipped with 1 each of 87 01 125/150/180/250/300





00 19 55 S5 LE

00 19 55 S5

Article No.	EAN 4003773-			Quantity
00 19 55 S5 N	082613	Cobra®-Set		
		87 01 125		1
		87 01 150		1
		87 01 180	KNIPEX Cobra® Hightech Water Pump Pliers	1
		87 01 250		1
		87 01 300		1
00 19 55 S5 LE N	082620	Tool Roll for KNII	PEX Cobra®, empty	

Wire Rope Cutters

Also for high-strength wire rope

Compact, light and powerful

Up to 30% less physical effort compared to wire rope cutters of the same length

Double-mounted box joint design for high level of stability

- > Cutting edges additionally induction hardened, cutting edge hardness approx. 64 HRC
- > Compact at 160 mm but nevertheless more powerful than many larger wire rope cutters
- > Secured by locking device during transport
- > Ball bearing steel



For cutting high-strength wire ropes (1960 N/mm2) with a diameter of up to 4 mm

Article No.		EAN 4003773-	Ø mm	Ø mm	∢ —► mm
95 62 160	N	082354	6,0	4,0	160
95 62 160 SB	N	082712	6,0	4,0	160



KNIPEX CoBolt® S

Compact Bolt Cutters

Compact and powerful

Extremely high cutting performance in a convenient length of 160 mm Small, slim head for excellent accessibility

- > Compact and powerful: cuts bolts, nails, rivets etc. up to a diameter of 4.4 mm
- > Heavy duty, induction hardened cutting edge for thin, hard wire, screws and springs. Cutting edge hardness approx. 64 HRC
- > Less physical effort due to efficient lever action mechanism




Powerful through to the tips

Slim head for ideal accessibility


Article No.	EAN 4003773-	Ø mm	Ø mm	Ø mm	Ø mm	4− ► mm
71 01 160 N	082668	5,3	4,4	3,2	3,0	160



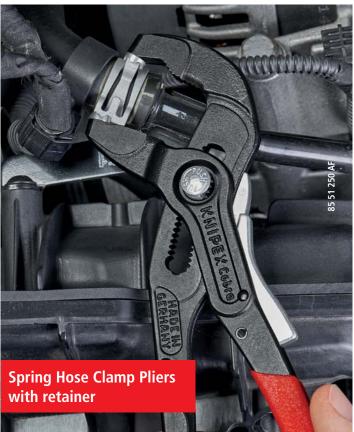

Spring Hose Clamp Pliers

- > Rotating, universal grip inserts for reliably gripping the clamps in all positions
- > Jaw inserts can also be rotated under load
- > Extremely good leverage which allows clamps to be opened easily without great effort
- > Slim head design; narrow head width, rotating grip inserts make this an ideal tool, especially in confined areas
- > Maximum jaw opening 80 mm; allows more than 40 mm clamping range
- > Can be used for standard, space-saving, spring wire hose clamps and for spring band clamps up to 70 mm nominal size







Article No.	EAN 4003773-	Adjustment positions	Capacity	4 ► mm		
85 51 180 A	081159	15	max. 50 mm	180		
85 51 250 A	077329	25	max. 70 mm	250		
85 51 250 AF	078623	19	max. 70 mm	250		
85 59 250 A	077336	Spare parts assortment grip inserts				







Hose Clamp Pliers For Click clamps

To open and close Click clamps

- > Rotating jaw inserts for the safe actuation of clamps in any position
- > Good leverage which allows clamps to be opened and closed again comfortably and easily without a great deal of effort
- > For easy working on fuel hoses, vacuum pipes and suction nozzles and many other applications
- > Additional function: detach hoses gently using the serrated jaw
- > Slim head design; narrow head width, rotating grip inserts make this an ideal tool, especially in confined areas










EAN		←→
4003773-	Adjustment positions	mm
081166	12	180
078517	25	250
078999	Spare parts assortment grip inserts	





- > Push the button for adjustment on the workpiece
- > Fine adjustment for optimum adaptation to different sizes of workpieces and a comfortable handle width
- > Self-locking on pipes and nuts: no slipping on the workpiece and low handforce required
- > Gripping surfaces with special hardened teeth, teeth hardness approx. 61 HRC: high wear resistance and stable gripping
- > Box-joint design for high stability due to double guide

> Reliable catching of the hinge bolt: no unintentional shifting





87 26 250





	- 11	78			
Article No.	EAN 4003773-	Adjustment positions	O∃ Ø Inch	mm	4− ► mm
87 01 125	069935	13	1	27	125
87 01 150	060116	11	1 1/4	30	150
87 01 180	022015	18	1 1/2	36	180
87 01 250	022022	25	2	46	250
87 01 300	034087	30	2 3/4	60	300
87 01 400	005636	27	3 1/2	95	400
87 01 560	044321	20	4 1/2	120	560
87 26 250	071495	24	2	46	250



KNIPEX Cobra® QuickSet

Hightech Water Pump Pliers

87

87 01 400

87 01 560

87 01 300

Fully open, push, grab!

Additional fast adjustment on the workpiece by sliding the pliers handle

- > Combines the proven, reliable locking of the hinge bolt with an additional push function which makes it easier to work in very confined and inaccessible areas
- > The adjustment directly on the workpiece is possible by simply sliding the pliers handle
- > Reliable locking of the hinge bolt with the first workload. The gripping width of the pliers is then fixed and can only be adjusted by pressing the button
- > To re-activate the sliding function, the hinge bolt must be released by pressing the push button and the pliers must be completely opened again

87 22 250

> With slim two-colour multi-component sleeves without collar for better handling and easier transport

Article No.	EAN 4003773-	Adjustment positions	Ø Inch	O]; Ø mm	mm	4− ► mm
87 21 250	072775	25	2	50	46	250
87 21 300	078524	25	2 3/4	70	60	300
87 22 250	077794	25	2	50	46	250





Press the button - open pliers completely



Position jaw - simply slide and close pliers



Hinge bolt locks itself with the first workload

KNIPEX Cobra® ES

Water Pump Pliers extra-slim

> Particularly good access to the workpiece due to very

in automotive and general industry

- slim construction of head and joint area > Ideal for service, maintenance and equipment repair,
- > Long, narrow jaws











85

	EAN		CO		4-
Article No.	4003773-	Adjustment positions	Ø Inch	mm	mm
87 51 250	061267	19	1 1/4	34	250



KNIPEX SmartGrip®

Water Pump Pliers with automatic adjustment

- > Ideal for frequent changeovers to workpieces of different sizes
- > Automatic adjustment per one-hand operation both for right-handed and left-handed use
- > Good access to the workpiece thanks to the slim dimensions of head and joint area and flush joint bolt
- > Self-locking on pipes and nuts: no slipping on the workpiece and low handforce required
- > Gripping surfaces with special hardened teeth, teeth hardness approx 61 HRC: high wear resistance and stable gripping
- > Box-joint design for high stability due to double guide
- > Locking lever for space saving transport with reliable closed handles

Article No.	EAN 4003773-	O∃ Ø Inch	O]; Ø mm	mm	4−→ mm
85 01 250	061304	1 1/4	32	36	250



Multiple Slip Joint Spanner

- > replaces a set of wrenches, ideal for tightening locknuts
- > zero-backlash gripping of metric or imperial hexagonal headed screws, no rounding of bolt heads
- > for metric and imperial nuts and screws with widths across flats from 10 to 32 mm (3/8" up to 1 1/4")
- > reliable and tight gripping of rounded, rusty, or thick coated bolts and screws







	EAN		O]	\Box	← ►
Article No.	4003773-	Adjustment positions	Ø Inch	mm	mm
87 41 250	054566	15	3/8 - 1 1/4	10 - 32	250

KNIPEX Alligator®

Water Pump Pliers

> Self-locking on pipes and nuts: no slipping on the workpiece and low handforce required

- > Gripping surfaces with special hardened teeth, teeth hardness approx. 61 HRC: high wear resistance and stable gripping
- > Box-joint design for high stability due to double guide







88 01 250

	EAN		O	0]	\bigcirc	← ►
Article No.	4003773-	Adjustment positions	Ø Inch	Ømm	mm	mm
88 01 180	035480	9	1 1/2	42	36	180
88 01 250	022992	9	2	50	46	250
88 01 300	034094	9	2 3/4	70	60	300

More output and comfort compared to conventional water pump pliers of the same length: 9-notch adjustment positioning for 30 % more gripping capacity

KNIPEX Alligator® XL

88

88

The classic model, also in 400 mm length

- > 11-notch adjustment positioning with a gripping capacity up to 3 1/2"
- > Robust adjustment mechanism, insensitive to dirt, easy to clean; particularly suitable for outdoor work
- > Good access to the workpiece due to slim size of head and joint area
- > Self-locking on pipes and nuts:
- no slipping on the workpiece and low handforce requiredn
- > Gripping surfaces with special hardened teeth, teeth hardness approx. 61 HRC: high wear resistance and stable gripping
- > Box-joint design for high stability due to double guide
- > Guard prevents operators' fingers being pinched
- > Chrome vanadium electric steel, forged, multi stage oil-hardened

	EAN	Adjustment	OJ	O]	(C)	4-
Article No.	4003773-	positions	Ø Inch	Ømm	mm	mm
88 01 400	075844	11	3 1/2	90	95	400

Cobra® Set						00
88 01 400	075844	11	3 1/2	90	95	400

> Pliers grey atramentized, handles with non-slip plastic coating

Water Pump Pliers

Alligator® Set Water Pump Pliers	00

> Pliers with polished heads; handles with non-slip plastic coating

Bestseller-Set	00

> Pliers with polished heads; handles with non-slip plastic coating and with two-colour multi-component grips





Article No.	EAN 4003773-	Content
00 20 09 V02	074793	87 01 180 87 01 250 87 01 300

\mathscr{U}	Article No.	EAN 4003773-	Content
	00 20 09 V03	074809	88 01 180 88 01 250 88 01 300

	,		
residence of	00 20 09 V03	074809	88 01 180 88 01 250 88 01 300

Article No.	EAN 4003773-	Content
00 20 09 V01	073994	03 02 180 70 02 160 87 01 250





For Oil filters, tube fittings and connectors up to 80 mm diameter Fine adjustment for ideal adjustment to diverse diameters Robust, heavy duty

- > Ideal for tightening and loosening siphon screw connections, plastic pipe fittings and round union nuts
- > For connectors and couplings with screw connection, such as Cannon circular connectors
- > For gentle loosening of hoses on nozzles and filter cartridges
- > 25 adjustment positions, box-joint design
- > Ergonomic handle geometry
- > Chrome vanadium electric steel, forged, oil-hardened

81 01 250 / 81 03 250

> With serrated gripping jaws; up to Ø 80 mm

81 11 250 / 81 13 250

> With exchangeable plastic jaws for sensitive surfaces; up to Ø 75 mm













TT-28072	-					
Article No.	EAN 4003773-		Pliers	Working Capacity Ø mm	Adjustment positions	4−▶ mm
81 01 250	078463		black atramentized, head polished	25 – 80	25	250
81 03 250	078487		chrome plated	25 – 80	25	250
81 11 250	078470		black atramentized, head polished	10 – 75	25	250
81 13 250	078494		chrome plated	10 – 75	25	250
81 19 250	078500	2 nai	rs of plastic jaws for 81 11 250 / 81 13 250			



10 profiles 2 crosses 1 key. All common locking systems. 00

- > Multifunctional key for the actuation of locking systems from the areas of facilities engineering (heating and sanitation, air conditioning, electro technology), gas and water supply and shut-off-systems
- > 8-arm version: two 4-way spider keys connected in a space-saving way using magnets
- > Reversible bit: 1.0 x 7 mm slot and PH2 cross slot
- > Key and reversible bit joined by stable stainless steel wire
- > Weight-optimised zinc die-cast design





	•						
Article No.	EAN 4003773-	○ □	△ ∃	-O ⊒ Ø mm	○ ∃	mm	4—▶ mm
AITICIE IVO.	4003773-	111111	1111111	וווווו	1111111	1111111	1111111
00 11 01	074670	5/6-7/8- 9/10-11	7 – 8 / 9 – 10 / 11 – 12	3 – 5	6	6 – 9	92





Pliers and a wrench in a single tool Replaces the need for sets of metric and imperial spanners

- > Adjustable tightening tool
- > Parallel jaws give a more solid grip; its design allows flexible adjustment of all widths up to the specified maximum size
- > Also excellent for gripping, holding, pressing and bending workpieces
- > Smooth jaws for damage free installation of plated fittings working directly on chrome!
- > Zero backlash jaw pressure prevents damage to edges of sensitive components
- > Lever transmission greater than 10: 1 for strong gripping power



New: 86 01 250 / 86 02 250 (page 4)







Article No.	EAN 4003773-	Adjustment positions	Inch	mm	4−▶ mm
86 03 125	077497	11	7/8	23	125
86 03 150	069676	14	1	27	150
86 03 180	035466	13	1 3/8	35	180
86 03 250	033837	17	1 3/4	46	250
86 03 300	041429	22	2 3/8	60	300
86 05 150	069928	14	1	27	150
86 05 180	047162	13	1 3/8	35	180
86 05 250	047841	17	1 3/4	46	250
86 43 250	081296	17	1 3/4	46	250





Pliers Wrench XL

Pliers and a wrench in a single tool

- > Adjustable tightening tool; also excellent for gripping, holding, pressing and bending workpieces — replaces diverse expensive, large open-end wrenches up to AF 85 mm or 3 3/8"
- > Smooth jaws, for damage free installation of quality union joints made from brass, red brass or stainless steel
- > Zero backlash jaw pressure prevents damage to edges of sensitive components
- > Push the button for adjustment on the workpiece



86

	EAN		\bigcirc	\bigcirc	← ►
Article No.	4003773-	Adjustment positions	Inch	mm	mm
86 03 400	077312	25	3 3/8	85	400

Set of pli	ers wre	nches			00
86 03 400	077312	25	3 3/8	85	400
AITICIE NO.	4003773-	Aujustinent positions	IIICII	1111111	1111111

- > Tool roll made of hard-wearing polyester fabric
- > With hook and loop fastener

5-piece

Article No.	EAN 4003773-	Content
00 19 55 S4	077817	86 03 125 / 86 03 150 / 86 03 180 / 86 03 250 / 86 03 300
00 19 55 S4 LE	077824	Tool Roll for pliers wrenches, empty











Article No.

48 11 J0

48 11 J1

48 11 J2

48 11 J3

48 11 J4

48 21 J01

48 21 J11

48 21 J21

48 21 J31

48 21 J41

Article No.

49 11 A0

49 11 A1

49 11 A2

49 11 A3

49 11 A4

49 21 A01

49 21 A11

49 21 A21

49 21 A31

49

EAN

4003773-

048510

048527

048534

048541

048558

048619

048633

048640

048657

048664

FAN

4003773-

048718

048725

048732

048749

048756

048817

048824

048831

048848

Description

straight tips

straight tips

straight tips

straight tips

straight tips

90° angled tips

Description

straight tips

straight tips

straight tips

straight tips

straight tips

90° angled tips

90° angled tips

90° angled tips

90° angled tips

Precision Circlip Pliers for external circlips on shafts \circ

Size of bore

Ømm

8 – 13

12 – 25

19 - 60

40 - 100

85 - 140

8 – 3

12 - 25

19 - 60

40 - 100

85 - 140

Size of bore

Ø mm

3 – 10

10 - 25

19 - 60

40 - 100

85 - 140

3 - 10

10 - 25

19 - 60

40 - 100

mm

140

140

180

225

320

130

130

165

210

305

mm

140

140

180

225

320

130

130

165

210

Tips Ø mm

0.9

1.3

1.8

2.3

3.2

0.9

1.3

1.8

2.3

3.2

Tips

 \emptyset mm

0.9

1.3

1.8

2.3

3.2

0.9

1.3

1.8

2.3

With inserted tips for reliable work Heavy duty in continuous operation: up to 10 times longer service life compared to turned tips


- > Large contact faces on the tips: no distortion of circlips
- > Inserted tips: spring steel wire, drawn
- > Bolted joint: precise, zero backlash operation of pliers







Circlips are held reliably: large contact areas and the position of the tips make it difficult for the circlip to bounce off



Form-fitting inserted and pressed-in tips made of high-density spring steel offer a high level of protection against excessive stress and strain



Spring inside the joint: the spring is protected inside the precisely bolted joint. It does not hinder work and cannot get dirty or lost.



48 31 J1/J2 und 49 31 A1/A2: With overexpansion guard (adjustable using end stop), Excessive expansion of rings is effectively prevented.



Precision Circlip Pliers for internal circlips in bore holes

Article No.	EAN 4003773-	Description	Size of bore Ø mm	Tips- Ø mm	◄─► mm
48 31 J0	048619	straight tips	8 - 13	0,9	180
48 31 J1	073864	straight tips	12 – 25	1,3	140
48 31 J2	073871	straight tips	19 – 60	1,8	180
48 41 J01	079569	90° angled tips	8 - 13	0,9	130
48 41 J11	079576	90° angled tips	12 - 25	1,3	130
48 41 J21	080695	90° angled tips	19 - 60	1,8	165
48 41 J31	079590	90° angled tips	40 - 100	2,3	210



Precision Circlip Pliers for external circlips on shafts

			-		
Article No.	EAN 4003773-	Description	Size of bore- Ø mm	Tips- Ø mm	∢ —▶ mm
49 31 A0	061748	straight tips	3 - 10	0,9	140
49 31 A1	073895	straight tips	10 - 25	1,3	140
49 31 A2	073901	straight tips	19 - 60	1,8	180
49 31 A3	073918	straight tips	40 - 100	2,3	225
49 41 A01	061755	90° angled tips	3 - 10	0,9	130
49 41 A11	079606	90° angled tips	10 - 25	1,3	130
49 41 A21	079613	90° angled tips	19 - 60	1,8	165
49 41 A31	079620	90° angled tips	40 - 100	2,3	210





Circlip Pliers For internal circlips in bore holes

44





		1			
Article No.	EAN 4003773-	Description	Size of bore Ø mm	Tips Ø mm	◄─► mm
44 11 J0	040286	Description pliers black atramentized, head polished, handles plastic coated; DIN 5256 C; straight tips pliers black atramentized, head polished, handles plastic coated; DIN 5256 D; 90° angled tips 290° pliers black atramentized, head polished, handles plastic coated; DIN 5256 D; 90° angled tips 290° pliers black atramentized, head polished, handles plastic coated; 45° angled tips 45° angled tips 45° angled tips pliers black powder coated, with locking device, can be released; straight tips pliers black powder-coated; with locking device, can be released; 90° angled tips 252 – 400 1 pair of spare tips for 44 10 J5 1 pair of spare tips for 44 10 J6 1 pair of spare tips for 44 20 J51 1 pair of spare tips for	0,9	140	
44 11 J1	022862		12 – 25	1,3	140
44 11 J2	022879	,	19 – 60	1,8	180
44 11 J3	033943	straight tips	40 – 100	2,3	225
44 11 J4	042549] '	85 – 140	3,2	320
44 21 J01	040132	pliers black atramentized, head	8 – 13	0,9	130
44 21 J11	022886	1.	12 – 25	1,3	130
44 21 J21	022893	DIN 5256 D; 90° angled tips <u>×</u> 90°	19 – 60	1,8	170
44 21 J31	033769	<u>∡9</u> 0°	40 – 100	2,3	215
44 21 J41	043683		85 – 140	3,2	300
44 31 J02	066941	pliers black atramentized, head	8 – 13	0,9	140
44 31 J12	066958	Description Ø mm Ø	1,3	140	
44 31 J22	066965	,	19 – 60	1,8	180
44 31 J32	066972	<u>∡4</u> 5°	40 – 100	2,3	225
44 31 J42	066989	_	85 – 140	3,2	310
44 10 J5	024910	pliers black powder coated, with	122 – 300	3,5	570
44 10 J6	024927		252 – 400	4,5	580
44 20 J51	024958	pliers black powder-coated; with	122 – 300	3,5	590
44 20 J61	024965	_	252 – 400	4,5	600
44 19 J5	024934	' '			
44 19 J6	024941				
44 29 J51	024972	' '			
44 29 J61	024965	' '			

Circlip PliersFor external circlips on shafts

46







A CLAN	EAN	L	Size of bore	Tips	←→
Article No.	4003773-	Description	Ømm	Ømm	mm
46 11 A0	033950	pliers black atramentized, head	3 – 10	0,9	140
46 11 A1	022909	polished, handles plastic coated; DIN 5254 A; straight tips	10 – 25	1,3	140
46 11 A2	022916		19 – 60	1,8	180
46 11 A3	033974		40 – 100	2,3	210
46 11 A4	042532		85 – 140	3,2	320
46 21 A01	033967	pliers black atramentized, head	3 – 10	0,9	125
46 21 A11	023005	polished, handles plastic coated;	10 – 25	1,3	125
46 21 A21	022923	DIN 5254 B; 90° angled tips	19 – 60	1,8	170
46 21 A31	033981	₹ao. WW	40 – 100	2,3	200
46 21 A41	039365		85 – 140	3,2	300
46 31 A02	066996	pliers black atramentized, head polished, handles plastic coated; 45° angled tips	3 – 10	0,9	130
46 31 A12	067009		10 – 25	1,3	130
46 31 A22	067016		19 – 60	1,8	185
46 31 A32	067023		40 – 100	2,3	210
46 31 A42	067030		85 – 140	3,2	310
46 10 A5	024996	pliers black atramentized; head	122 – 300	3,5	560
46 10 A6	025009	polished; handles plastic coated;	252 – 400	4,5	570
		straight tips	400 000		
46 20 A51	025023	pliers black powder-coated, with	122 – 300	3,5	570
46 20 A61	025030	locking device, can be released; 90° angled tips <u>190°</u>	252 – 400	4,5	580
46 19 A5	024316	1 pair of spare tips for 46 10 A5			
46 19 A6	025016	1 pair of spare tips for 46 10 A6			
46 29 A51	025047	1 pair of spare tips for 46 20 A51			
46 29 A61	025054	1 pair of spare tips for 46 20 A61			

Special Retaining Ring Pliers

For retaining rings on shafts

- > For fitting horseshoe-shaped spring retaining rings and circlips without grip holes
- > For shaft retaining devices
- > With opening spring
- > Chrome vanadium electric steel, forged, oil-hardened

Article No.	EAN 4003773-		4−→ mm
45 10 170	017370	○ ○ ∞ MM	170
45 21 200	031208	○ ○ ₹30° WW	200



45 10 170:

> For retaining rings with a minimum ring split gap of 3.6 mm



> Angled jaws with centering hole; for snap rings larger than 12.0 mm dia., e.g. for cardan shafts in a motor vehicle; minimum ring split gap of the rings 2.2 mm

Precision Circlip Pliers Set

00

45

- > High-quality, impact-resistant plastic case
- > Contains common Precision Circlip Pliers for highest requirements
- > Precisely-sized recesses for holding the pliers
- > Clearly organised storage of tools

Article No.	EAN 4003773-	Content
00 21 25	050131	1 x 48 11 J1 1 x 48 11 J2 1 x 48 21 J11 1 x 48 21 J21, 1 x 49 11 A1 1 x 49 11 A2 1 x 49 21 A11 1 x 49 21 A21



Circlip Pliers Sets

00 20

- > Contains common Precision Circlip Pliers for highest requirements
- > Sturdy plastic packaging, also suitable for storage of the pliers

00 20 04 V01



00 20 03 V02



00 20 03 SB



00 20 04 SB



Article No.	EAN 4003773-	Content
00 20 03 SB	050100	1 x 48 11 J1, 48 11 J2, 49 11 A1, 49 11 A2
00 20 03 V02	077640	1 x 44 11 J1, 44 11 J2, 46 11 A1, 46 11 A2
00 20 04 SB	062417	1 x 48 11 J1, 48 11 J2, 49 11 A1, 49 11 A2, 48 21 J11, 48 21 J21, 49 21 A11, 49 21 A21
00 20 04 V01	077633	1 x 44 11 J1, 44 11 J2, 46 11 A1, 46 11 A2, 44 21 J11, 44 21 J21, 46 21 A11, 46 21 A21

- > In a foam tray for workbenches and tool trolleys
- > Clearly organised storage of tools
- > Precisely-sized recesses for holding the pliers
- > Foam tray dimensions (W x H x D): 335 x 165 x 33 mm
- > Material: two colour, closed pore foam







00 20 01 V02

Circlip Pliers Set 00 20 01 V15

Pliers Set "Basic"

Article No.	EAN 4003773-	Content
00 20 01 V02	069652	1 x 48 11 J1, 48 11 J2, 48 21 J21, 49 11 A1, 49 11 A2, 49 21 A21
00 20 01 V15	081586	1 x 03 02 180, 26 12 100, 74 02 180, 87 01 250
00 20 01 V16	081593	1 x 08 21 145, 74 01 180, 28 71 280, 28 81 280
00 20 01 V17	081944	1 x 03 05 180 26 15 200 74 05 180 87 05 250





00 20 01 V16

Pliers Set "Automotive"


00 20 01 V17

Pliers Set "Basic Chrome"

Circlip Pliers Sets - 4 and 8 parts

00 19

- > Tool roll made of hard-wearing polyester fabric
- > With practical, adjustable quick release fastener

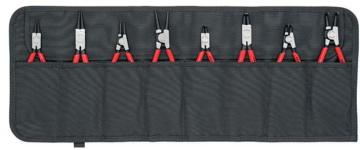

00 19 58 V01

> Eight common Circlip Pliers for internal and external circlips



00 19 56 V01

> Four common Circlip Pliers for internal and external circlips



00 19 57 V01

> Four common Precision Circlip Pliers for highest requirements



00 19 58 V02

> Eight common Precision Circlip Pliers for highest requirements

Article No.	EAN 4003773-	Content
00 19 56 V01	081548	1 x 44 11 J1, 44 11 J2, 46 11 A1, 46 11 A2
00 19 58 V01	081562	1 x 44 11 J1, 44 21 J2, 44 21 J11, 44 21 J21, 46 11 A1, 46 11 A2, 46 21 A11, 46 21 A21
00 19 57 V01	081555	1 x 48 11 J2, 44 21 J21, 49 11 A2, 49 21 A21
00 19 58 V02	081579	1 x 48 11 J1, 48 11 J2, 48 21 J11, 48 21 J21, 49 11 A1, 49 11 A2, 49 21 A11, 49 21 A21

Suitable for universal use, for 1-ear and 2-ear clamps (Oetiker system or similar)

- > For the simple and reliable mounting of 1-ear and 2-ear clamps (Oetiker system or similar)
- > No damage to press points on the ear clamps
- > The slim head permits good accessibility in confined areas
- > Versatile use for clamps on CV boots, cooler and fuel lines, air pressure systems, compressors
- > Durable and strong
- > High-grade special tool steel, forged, oil-hardened

> Especially suitable for universal use thanks to the additional side jaw





EAN			← ►
Article No.	4003773-	Description	mm
10 98 1220	080749		220
10 99 1220	080756	pliers black atramentized, head polished, handles plastic coated	220







Using the front press nib



10 99 I220: Using the side press nib



10 98 I220: Sealing the hose connection on central lubrication



10 99 I220: Sealing the fluid hose on the connecting piece

Halogen Bulb Exchange Pliers

30

41

- > For the installation of wedge base bulbs
- > Gripping surfaces plastic coated

Upholstery Pliers

91

- > For the professional fixing of seat covers on profiled seats to the seat frame with all popular upholstery clips
- > Securely insert upholstery clips, guide and hold: the special groove fixes the upholstery clips in the correct position
- > Easy positioning of the upholstery clips: a closing spring holds the pliers closed, the clip can be securely positioned and pressed
- > Upholstery clips can be easily pressed together due to a good transmission ratio of the pliers
- > User-friendly operation thanks to multi-component grips





	EAN		← ►
Article No.	4003773-	Description	mm
30 41 160	048480	head polished; handles plastic coated, Chrome vanadium electric steel, forged, oil-hardened	160



Α 9





	EAN		←→
Article No.	4003773-	Description	mm
1 92 180	080725	head polished; handles with multi-component grips	185

DIN ISO 5743. with transverse profiles

Special Long Reach Needle Nose Pliers with transverse profiles

For gripping, adjustment and assembly work in hard to reach areas thanks to slim, very long design

Deep parts can be easily reached using the slim, half-round tips

- > Careful yet reliable gripping, holding and guiding of small copper pipes, screws and cables as well as other round parts thanks to milled grooves with smooth surfaces
- > Serrated pipe grip to grip round parts
- > Particularly suitable for work in the automotive trade and in mechanical engineering
- > Slim yet robust tool; forged from special tool steel, oil-hardened and tempered

1	3	





	EAN		←
Article No.	4003773-	Description	mm
28 71 280	079415	head polished; handles plastic coated	280
28 81 280	079422	head polished; handles plastic coated	280

Needle-Nose Combination Pliers

08

Small High Leverage Combination Pliers with pointed jaw For all common installation and repair work

Handy use when working in confined areas thanks to slim head design and pointed jaws (anti-twist)

Gripping surfaces with special convex contour on one side for secure gripping of flat parts

Milled groove in the gripping area permits small parts such as nails, pins and bolts to be held and pulled

- > The reliable and diverse combination pliers when out and about
- > Easy cutting thanks to the high leverage joint
- > With cutting edges for soft, medium-hard and hard wire
- > Long service life and stable tips; forged from special high grade tool Steel, manifold oil-hardened













Firm grip also on flat material due to three-point rest Tip keeps its shape even during greater torsional forces

Article No.	EAN 4003773-	Ø mm	Ø mm	Ø mm	mm²	4 ► mm
08 21 145	078951	3.0	2.0	8.0	16	145
08 22 145	078968	3.0	2.0	8.0	16	145
08 25 145	078975	3.0	2.0	8.0	16	145
08 26 145	079361	3.0	2.0	8.0	16	145



Combination Pliers

03

- > With gripping zones for flat and round material, suitable for versatile use
- > With cutting edges for soft and hard wire
- > Cutting edges additionally induction hardened, cutting edge hardness approx. 60 HRC
- > Special tool steel, forged, oil-hardened

Article No.	EAN 4003773-	Ø mm	Ø mm	Ø mm	mm²	4−▶ mm
03 02 160	023203	3,1	2,0	10	16	160
03 02 180	023197	3,4	2,2	12	16	180
03 06 180	021926	3,4	2,2	12	16	180
03 02 200	034940	3,8	2,5	13	16	200






Mechanics' Pliers

38

- > High bending strength of the pliers tips
- > Gripping surfaces cross-hatched, knurled
- > Vanadium electric steel; forged, oil-hardened



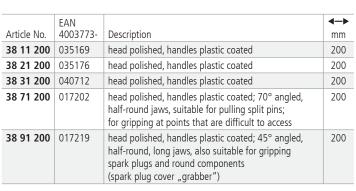



Gentle loosening of hoses in confined areas.







Snipe Nose Side Cutting Pliers (Radio Pliers)

- > Suitable for finer gripping and cutting work
- > Pointed, half-round jaws
- > Knurled gripping surfaces
- > With cutting edges for soft, medium-hard and hard wire
- > Cutting edges additionally induction hardened, cutting edge hardness approx. 61 HRC
- > Vanadium electric steel; forged, oil-hardened



	EAN		← ▶
Article No.	4003773-	Description	mm
25 02 140	023159	head polished, handles with multi-component grips	140
25 02 160	023166	head polished, handles with multi-component grips	160
25 21 160	015994	head polished, handles plastic coated	160





Snipe Nose Side Cutting Pliers (Stork Beak Pliers)

26

Elastic tips: dimensionally stable even when twisted

- > Distortion-tolerant, elastic precision tips
- > Half-round, long, pointed jaws
- > Vanadium electric steel; forged, oil-hardened






Article No.	EAN 4003773-	Description	4− ▶ mm
26 12 200	023142	head polished, handles with multi-component grips	200
26 22 200	023135	40° angled; head polished, handles with multi-component grips	200
26 16 200	022831	pliers chrome plated; handles insulated with multi-component grips, VDE-tested	200

Long Nose Pliers


30

- > Heavy-duty and hard-wearing gripping pliers
- > Different jaw styles
- > Chrome vanadium electric steel, forged, oil-hardened

	EAN		← ►
Article No.	4003773-	Description	mm
30 11 160	023128	head polished, handles plastic coated; long, trapezoidal jaws, knurled gripping surfaces	160
30 21 160	035053	head polished, handles plastic coated; long, half-round jaws, knurled gripping surfaces	160
30 31 160	035077	head polished, handles plastic coated; long, round jaws, smooth gripping surfaces	160

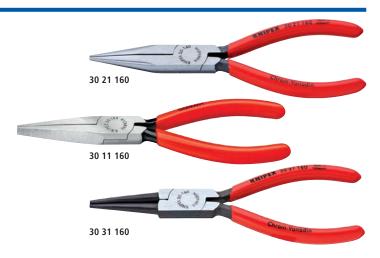

- > Hold round, profile and flat material securely
- > Heavy duty model
- > With adjustment screw and release lever
- > One-hand operation
- > High clamping pressure due to toggle lever action

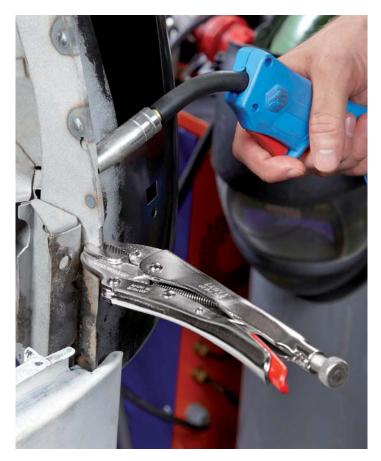





41 34 165

Article No.	EAN 4003773-		mm	\	4− ► mm
41 04 180	002741	30	20	30	180
41 04 250	002758	40	20	30	250
41 04 300	022183	65	30	34	300
41 34 165	047858	20	10	24	165

Welding Grip Pliers

- > For gripping, clamping and holding of diverse profiles
- > Heavy duty model
- > With adjustment screw and release lever
- > One-hand operation









	EAN		□⇉	O]	← ►
Article No.	4003773-	Description	mm	mm	mm
42 14 280	022206	also for section material with vertical webs up to 25 mm height; pliers bright zinc plated	50	30 – 65	280
42 34 280	022220	clamps cumbersome workpieces and sections with high webs up to 40 mm; pliers bright zinc plated	90		280

Carpenters' Pincers

- > For heaviest duty
- > Extreme wear resistance and well balanced
- > Cutting edge hardness approx. 60 HRC
- > Special tool steel, forged, oil-hardened



Article No.	EAN 4003773-	Description	Ø mm	4−→ mm
50 00 300	015710	pliers black atramentized, head polished	2.4	300

Farriers' Pincers (Tear-off Pliers for vehicle bodywork)

> Also suitable for dismantling work in vehicle body workshops

- > Cutting edges additionally hardened; cutting edge hardness approx. 59 HRC
- > Special tool steel, forged, oil-hardened



55

	EAN		Head width	← ►
Article No.	4003773-	Description	mm	mm
55 00 300	014072	pliers black atramentized, head polished	20	300



Concreters' Nippers

> Unobtained precision and long service life make these the

- most widely purchased concreters' nippers in the world > Cutting edges additionally hardened; cutting edge hardness approx. 61 HRC
- > High-grade special tool steel, forged, oil-hardened

Article No.	EAN 4003773-	Description	Ø mm	Ø mm	← ► mm
99 00 220	013273	pliers black atramentized	2.4	1.6	220
99 00 250	013280	pliers black atramentized	2.4	1.6	250
99 00 280	014096	pliers black atramentized	2.8	1.8	280



99 00 280

Wire Rope Cutters forged

95

99

- > Cuts all wire ropes without splaying, including those that are extremely strong
- > With two crimping dies for end caps on Bowden cable sheaths and end ferrules for traction cables
- > Comfortable work thanks to handy, slim design and internal opening spring
- > Bolted joint for precise blade guidance, re-adjustable
- > High leverage for reduced effort
- > Cutting-edge hardness approx. 64 HRC
- > Chrome vanadium heavy-duty steel, forged, oil-hardened

Article No.	EAN 4003773-	Ø mm	Ø mm	Ømm	Ø mm	4—▶ mm
95 61 190	040651	7.0	5.0	4.0	2.5	190







> Precision cutting edges for soft and hard wire as well as piano wire

- > Cuts bolts, nails, rivets, etc. up to 5.2 mm dia.
- > Most efficient joint design ensures exceptional cutting performance
- > Cutting edges additionally induction hardened, cutting edge hardness approx. 64 HRC
- > Chrome vanadium heavy-duty steel, forged, oil-hardened

71 12 / 22 200

> Opening spring and locking device are integrated in the handles also for comfortable work and protected transport

71 41 200

> 20° angled head with single-sided joint bar and diagonal cutting edge for flush cutting; with space for gripping









New: KNIPEX CoBolt® (page 5)

_{71 41 200} <u>√20°</u>

Article No.	EAN 4003773-		Ømm	Ømm	Ø mm	Ø mm	4−▶ mm
71 01 200	033165		6.0	5.2	4.0	3.6	200
71 02 200	047056		6.0	5.2	4.0	3.6	200
71 12 200	066859	MM	6.0	5.2	4.0	3.6	200
71 31 200	042327		6.0	5.2	4.0	3.6	200
71 22 200	066873	MM <u>√2</u> 0°	6.0	5.2	4.0	3.6	200
71 41 200	066897	<u>∡′2</u> 0°	6.0	5.2	4.0	3.6	200

KNIPEX CoBolt® XL Compact Bolt Cutters

The compact bolt cutters from KNIPEX now also available with long handles for one and two-hand operation.

Up to a 40-fold increase of manual force.

For powerful cutting of larger cross-sections as well as very hard materials

Two-hand operation for maximum cutting force

- > 60 % less effort required compared to high leverage diagonal cutters of the same size
- > 40-fold increase of manual force due to special joint design
- > With gripping surface below the joint for gripping and pulling wires with a diameter as from 1.0 mm

	EAN		•		4-
Article No.	4003773-	Ømm	Ø mm	Ømm	mm
71 01 250	079637	5.6	4.0	3.8	250
71 31 250	079644	6.0	4.3	4.2	250





71 31 250

> Blades with recess for easier cutting of larger cross-sections thanks to better leverage close to the fulcrum



71 01 250



71 31 250

Pipe Cutter


For plastic conduit pipes and hoses

> For cutting thin walled plastic pipes (conduit plastic pipes) and flexible hoses, also with fabric reinforcement, of plastic and rubber up to 25.0 mm/1" exterior dia.

- > Not suitable for cutting cables
- > With opening spring and locking device




			m
	EAN	Cutting capacities	← ►
Article No.	4003773-	Ø mm	mm
90 20 185	067122	25	185

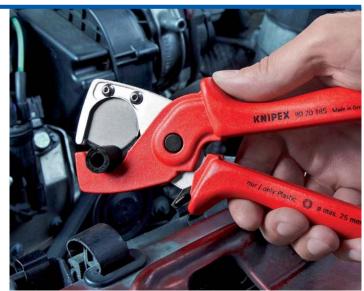

Anvil shears

Versatile, slim cutters with shear-action draw cut for the energy-saving, accurate cutting of soft and fibrous materials

- > Drawing cut against firm surface for cutting soft materials without damage, e.g. rubber profiles, PVC, leather, wood, hoses etc.
- > Cuts flat material with a max. width of 40 mm and height of 7.5 mm
- > Cutting capacity for round material up to ø 25 mm
- > Strong, replaceable blade
- > With opening spring and locking device
- > Tool body: tool steel, rolled, oil-hardened

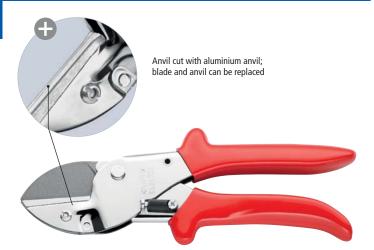

	EAN				Blade length	← ►
Article No.	4003773-		Tool	Handles	mm	mm
94 55 200	080763	MM	chrome plated	with plastic grips	40	200

Combination Shears

- > For cutting cardboard, plastics, aluminium, brass and copper foils
- > Precision ground, hardened blades
- > With opening spring and locking device
- > Not suitable for steel wire or iron sheets
- > Shears body: surgical steel, stainless, vacuum-hardened
- > Handles: plastic, impact-proof





Article No.	EAN 4003773-		⋖─► mm
95 05 185	060277	<u>√4</u> 0°	185
95 05 190	019602		190

Diagonal Cutters


70

- > The indispensable diagonal cutter for all-round use
- > High-quality material and precise workmanship for long service life
- > Precision cutting edges for soft and hard wire
- > Clean cutting of thin copper wires, also at the cutting-edge tips
- > Cutting edges additionally induction hardened, cutting edge hardness approx. 62 HRC
- > Narrow head style for use in confined areas

Precision rivet:

> Vanadium electric steel, forged, multi stage oil-hardened

















Article No.	EAN 4003773-	Ø mm	Ø mm	Ø mm	∢ —▶ mm
70 02 160	034032	4,0	3,0	2,0	160
70 05 160	039600	4,0	3,0	2,0	160
70 06 160	080022	4,0	3,0	2,0	160
70 02 180	034049	4,0	3,0	2,5	180
70 05 180	043706	4,0	3,0	2,5	180
70 06 180	033813	4,0	3,0	2,5	180

KNIPEX X-Cut® Compact Diagonal Cutters

73

Powerful, light and universal

Cuts finest strands as well as multi-core cables and piano wires

- > Box-joint design: highest stability with low weight
- > Doubly supported joint axis for heaviest duty
- > High cutting performance with minimum effort due to optimum co-ordination of the cutting edge angle and transmission ratio
- > Large opening width for thicker cables
- > Cuts precisely, even through fine copper wires
- > Compact, low-weight construction
- > Chrome vanadium heavy-duty steel, forged, multi stage oil-hardened



Article No.	EAN 4003773-	Ø mm	Ømm	Ø mm	Ø mm	Ø mm	4− ► mm
73 02 160	075127	4,8	3,8	2,7	2,2	12	160
73 05 160	075134	4,8	3,8	2,7	2,2	12	160





- > For very tough, continuous use
- > High cutting performance with minimum effort due to optimum co-ordination of the cutting edge angle and transmission ratio
- > Precision cutting edges additionally induction hardened (cutting edge hardness approx. 64 HRC), for all sorts of wire including piano wire
- > Chrome vanadium heavy-duty steel, forged, multi stage oil-hardened



Article No.	EAN 4003773-		Ø mm	Ø mm	Ø mm	d— ► mm
74 02 160	023081		3,4	2,5	2,0	160
74 02 180	023074		3,8	2,7	2,2	180
74 02 200	040309		4,2	3,0	2,5	200
74 02 250	042402		4,6	3,5	3,0	250
74 06 200	033820	☆ 1000 V △	4,2	3,0	2,5	200







KNIPEX TwinForce®
High Performance Diagonal Cutters

73

The superior High-Leverage Diagonal Cutter with patented double joint

- > Ideal transmission of force due to double-hinged design
- > Reliably cuts all types of wire, including steel tape
- > For rough or very fine cutting
- > Low cutting impact: gentle on hands. The tension on muscles and tendons is relieved
- > For comfortable cutting, repetitive cutting or extremely hard cutting iobs
- > High degree of stability and zero-backlash due to precisely milled forged-in axles
- > Chrome vanadium heavy-duty steel, forged, oil-hardened

73 72 180 F

> With opening spring to simplify reapplication and for repetitive cutting









73 71 180

(PATENTED)

Article No.	EAN 4003773-	Ø mm	Ø mm	Ø mm	Ø mm	4−→ mm
73 71 180	074762	5.5	4.6	3.2	3.0	180
73 72 180	074779	5.5	4.6	3.2	3.0	180
73 72 180 F	077657	5.5	4.6	3.2	3.0	180

Insulation Stripper with Cable Shears


Insulation strippers with cable shears — two essential electrical installation tools in one pair of pliers

- > Integrated cable shears for the clean cutting of Cu and Al cables without crushing
- > Universal adjustment of the wire stripping blades by means of a knurled screw
- > Slim design for good accessibility
- > For stripping single, multiple and fine stranded conductors with plastic and rubber insulation up to a max. of \emptyset 5 mm or resp. 10 mm² conductor cross-section
- > Graduated jaw is a visual orientation aid when stripping wire in standard lengths (11 mm and 16 mm)
- > Special high grade tool steel that has been oil hardened in multiple stages





Induction hardened shear blade with precisely ground cutting edges for crushing-free cutting of copper cables up to Ø 15 mm (5 x 2.5 mm2)



Lock nut prevents any unintentional adjustment



Length marking: visual markings provide support during repeated stripping of wire in standard lengths (11 and 16 mm)

					Cutting	capacities	Stripping	capacities	
	EAN				❸	⊕		_	←
Article No.	4003773-	Pliers	Head	Handles	Ømm	mm ²	Ømm	mm ²	mm
13 62 180	081302	black atramentized	polished	with multi-component grips	15	50	5,0	10	180
13 66 180	081319	chrome plated		insulated with multi-component grips. VDE-tested	15	50	5,0	10	180

Insulation Strippers

- > Or single, multiple and fine stranded conductors with plastic or rubber insulation max. 5.0 mm dia. or resp. 10 mm² cable cross section
- > Easy adjustment to the required diameter of solid or stranded wire with knurled screw and lock nut
- > Special tool steel, forged, oil-hardened

			Stripping	capacities		
Article No.	EAN 4003773-		Ø mm	mm²	AWG	4− ► mm
11 05 160	039570	MM	5.0	10	7	160
11 06 160	021933	//// ☆1000 V △/	5.0	10	7	160

11 06 160 Too V Comments

Pliers for Electrical Installation

13

The mobile task force

Multifunctional pliers for the electrical installation; to grip flat and round material, for bending, deburring, cutting cable, stripping and crimping end sleeves (ferrules)

6 functions in one pair of pliers

- > Smooth surfaces near the tips grip single cores without damaging them; serrated gripping surfaces and pipe grip for gripping flat and round material
- > Clear-cut outside edge on the jaw for working on flush-mounted junction boxes and deburring feed-through holes
- > Stripping holes for conductors of 0.75 1.5 mm² and 2.5 mm²
- > Crimp die for wire-end ferrules $0.5-2.5 \text{ mm}^2$
- > Cable shears with (induction-hardened) precision cutting edges for copper and aluminium cables up to 5 x 2.5 mm 2 /dia. 15 mm
- > Slim dimensions for easy access
- > Bolted joint: precise, zero backlash operation of pliers







					Cutting c	apacities	
Article No.	EAN 4003773-	Pliers	Head	Handles	Ø mm	mm²	4−▶ mm
13 81 200	075240	black atramentized	polished	plastic coated	15	50	200
13 82 200	075080	black atramentized	polished	with multi-component grips	15	50	200


Automatic Insulation Stripper

- > Compact standard tool at a favourable price for all current cable cross-sections and insulating materials
- > For single, multiple and fine stranded cables of 0.2 up to 6 mm² with standard insulation
- > Narrow head style for use in confined areas
- > Blades: special tool steel, oil-hardened, interchangeable

Article No.	EAN 4003773-	mm²	₩ AWG	4−▶ mm
12 62 180	054573	0.2 - 6	24 – 10	180









Adjustable length stop



Precise stripping prevents damage to the conductor

Self-Adjusting Insulation Stripper

- > For single, multiple and fine stranded conductors with plastic or rubber insulation
- > Cutting depth can be adjusted for different insulation materials
- > Blade: special tool steel, oil-hardened



Article No.	EAN 4003773-	mm²	AWG	4−▶ mm
12 40 200	026662	0.03 - 10	32 - 7	200

MultiStrip 10

Automatic Insulation Stripper

12

Universal blade geometry -robust and more durable Ideal grip design with excellent haptics Recessed wire cutter

- > Fully automatic adjustment to all single-, multi- and fine-stranded conductors with standard insulation throughout the entire capacity range from 0.03 to 10.0 mm²
- > No manual fine adjustment necessary
- > No damage to the conductors
- > The clamping jaws made of steel hold the cable in a way that prevents slipping without damaging the remaining insulation



Article No.	EAN 4003773-	Stripping capacities mm²	AWG	◄─► mm
12 42 195	054580	0.03 - 10	32 – 7	195



Precise stripping from 0.03 to 10 mm² without re-adjustment

Steel clamping jaws avoid slipping of the cable

Wire cutter for multiple stranded wire cables up to 10.0 mm²





Crimping Pliers

- > For cutting cables, stripping wire and crimping insulated and non-insulated terminals, connectors and plug type connectors
- > With threaded holes for cutting copper and brass screws threaded M 2.6 / M 3 / M 3.5 / M 4 and M $\dot{5}$
- > Bolted joint for higher stability and even movement









	EAN			Cap	acity	← ►
Article No.	4003773-			mm²	AWG	mm
97 21 215	019688	<u>-</u>		0,5 – 6	20 – 10	230
97 21 215 B	019695	M	Cardo Cardo	0,5 – 2,5	20 – 13	230
97 21 215 C	019701	V	OF-	0,5 – 6	20 – 10	230

Crimping Pliers

- > For cutting cables, stripping wire and crimping insulated and non-insulated terminals, connectors and plug type connectors
- > With threaded holes for cutting copper and brass screws threaded M 2.6 / M 3 / M 3.5 / M 4 and M 5
- > Bolted joint for higher stability and even movement
- > Special steel, high-strength

	EAN			Capac	city	← ►
Article No.	4003773-			mm ²	AWG	mm
97 22 240	070726	M		0,5 – 6,0	20 – 10	240
			Carle Contract	0,5 – 2,5	20 – 13	
97 32 240	079491	U		0,5 – 6,0	20 – 10	240
			OF FEE			



PreciForce® Crimping Pliers

- > Repetitive, high crimping quality due to precision dies and integral lock (self-releasing mechanism)
- > Crimping pressure has been set precisely (calibrated) in the factory, re-adjustable
- > Optimum transmission of force thanks to toggle lever for fatique-reduced operation
- > Good handling thanks to favourable handle position, low weight, compact design and ergonomically shaped handles





		97 52 36		
Article No.	EAN 4003773-	Description		4−→ mm
97 52 33	051862	non-insulated crimp terminals, tube and compression cable lugs in accordance with DIN 46234 and DIN 46235 and non-insulated crimp, butt and press connectors in accordance with DIN 46341 and DIN 46267 0.5 – 10 mm²; AWG 20 – 7		220
97 52 35	051886	non-insulated open plug type connectors (plug width $4.8 + 6.3$ mm) $0.5 - 6$ mm ² ; AWG $20 - 10$	See the	220
97 52 36	051893	insulated terminals, plug connectors + butt connectors 0.5 – 6 mm²; AWG 20 – 10	F	220
97 52 37	063193	Sheat shrinkeable sleeve connectors 0.5 – 6 mm ² : AWG 20 – 10	O Service Control of the Control of	220

Also for insulated and non-insulated end sleeves (ferrules) 10 / 16 / 25 mm²

Universal indent crimping die for non-insulated connectors

- > Cimping pliers with round magazine and five interchangeable dies
- > Just one tool for the most common crimping applications
- > Crimping dies changed quickly and easily without any additional tool
- > Sorted and protected storage of the interchangeable dies in a round magazine
- > Comfortable, powerful crimping pliers in professional quality
- > Same reliable crimping results as with fixed crimping dies
- > Repetitive, high crimping quality due to precision dies and integral lock (self-releasing mechanism)





Changing position: service lever opens out for parallel jaw positioning



Changing the crimping dies: unlock the magazine position, take out the set of dies which the pliers have been pushed on



Fold in the service lever and press the pliers – ready for use again

	EAN					Capacityt		←→
Article No.	4003773-					mm ²	AWG	mm
97 33 01	066927			WW	KNIPEX MultiCrimp®			250
		See the	^		non-insulated open plug type connectors (plug width 4.8 + 6.3 mm)	0,5 – 6	20 – 10	
		-			insulated terminals, plug connectors and butt connectors	0,5 – 6	20 – 10	
					insulated and non-insulated end sleeves (ferrules)	0,25 – 6	23 - 10	
97 33 02	066934			MM	KNIPEX MultiCrimp®			250
		See the	/		non-insulated open plug type connectors (plug width 4.8 + 6.3 mm)	0,5 – 6	20 – 10	
		-	U		insulated terminals, plug connectors and butt connectors	0,5 – 6	20 – 10	
					insulated and non-insulated end sleeves (ferrules)	0,25 – 6	23 – 10	
					insulated and non-insulated end sleeves (ferrules)	10 / 16 / 25	7/5/3	
		01	~		non-insulated crimp terminals, tube and compression cable lugs in accordance with DIN 46234 and DIN 46235 and non-insulated crimp, butt and press connectors in accordance with DIN 46341 and DIN 46267	0,5 – 10	20 – 7	

Electronic Super Knips®

- > Precision pliers for ultra fine cutting work
- > Ground, very sharp cutting edges without bevel
- > Shear cut with controlled micro cutting edge misalignment for the most precise cutting of even the thinnest of wires and for a long service life
- > Precision shaped tips cut wires resting on a board from 0.2 mm dia.
- > Joint with stainless steel rivet
- > Cutting edges additionally induction hardened
- > Extremely smooth movement for minimum operator fatigue

			Can	acity	
			Cap	derty	
	FANI		(🖷		
Article No.	EAN 4003773-		Ø mm	Ømm	4−► mm
Article No. 78 03 125		№ / \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \	Ø mm 0.2 - 1.6	Ø mm 1.2	4 → mm 125
	4003773-	& \ \\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\			





Electronic Super Knips® XL

78

Additional 15 mm longer version: greater stability, improved cutting performance

- > Precision ground cutting edges without bevel for accurate flush cutting through the finest of wires e.g. in electronics and precision engineering
- > Precisely shaped tips also cut adjacent wires from Ø 0.2 mm
- > With opening spring and opening limiter for convenient, ergonomic and fast working due to automatic opening and user-friendly handle width
- > Extremely smooth movement for minimum operator fatigue due to joint with stainless steel rivet

78 03 140 / 78 03 140 ESD

> Durable and stainless, made from INOX surgical steel, cutting edges hardened to 54 HRC

78 61 140 / 78 61 140 ESD

> Heavy duty, made from burnished special tool steel, cutting edges additionally induction hardened to 64 HRC








Article No.	EAN 4003773-		Handles	Ø mm	Ø mm	4− ► mm
78 03 140	081647	x8 MM ₹	with multi-component grips	0,2 - 2,1	1,2	140
78 03 140 ESD	081661	283 MM *	with multi-component grips	0,2 - 2,1	1,2	140
78 61 140	081685	№ MM ▼	with multi-component grips	0,2 - 2,1	1,4	140
78 61 140 ESD	081708	\$ MM ▼	with multi-component grips	0,2 - 2,1	1,4	140

PLIERS ABC – TECHNICAL BASICS

BASIC SHAPES OF THE JAWS

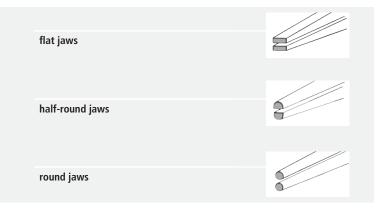

Cutting Pliers for cutting or nipping (diagonal, centre and end cutters, carpenters' pincers etc.)



Gripping Pliers (flat-, long-nose and water pump pliers etc.)

JOINT CONNECTIONS







Forged-in joint axle

The rivet is part of one handle (forged from one piece)

- > high stability for highest strain
- > long service life

Joint with inserted rivet

A proved, sturdy and precise rivet connection for all standard pliers.

Bolted joint

For particularly demanding requirements in terms of precision and smooth operation, e.g. in circlip pliers and cable shears (even the finest multi-stranded conductors have to be cut cleanly).



Combined Pliers for cutting and gripping (combination, stork beak and radio pliers etc.)



Special Pliersfor special applications, e.g. notching or punching different types of materials (sheet-metal nibbler, tile nibbling pincers etc.)

TYPES OF JOINTS

Lap joint


The two plier halves lie on top of each other but are not milled out.


Single joint

Half the thickness in each pliers handle is milled away in the joint area so that both handles can be laid into each other.


Box joint

One handle on the pliers is slit. The other handle is pushed through this slot. This joint connection can withstand a high level of load and strain because the joint bolt is supported on both sides and the inside handle is guided on both sides.








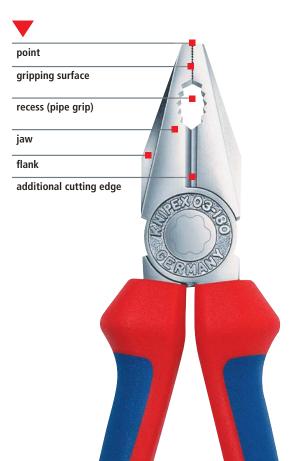


CUTTING EDGE – TECHNICAL BASICS

Direction and position of cutting edges

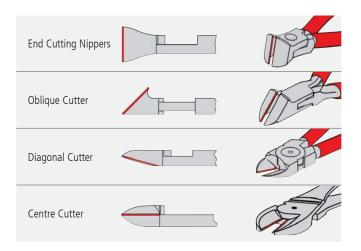

Cutting edge shapes DIN ISO 5742

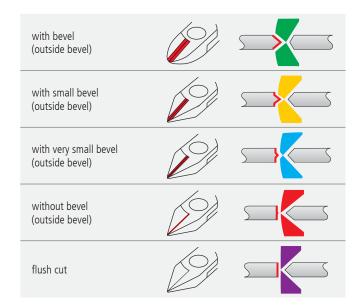


WIRE CLASSES

	Material examples	Type of wire	Tensile strength N/mm² kp/mm²		
•	Copper, plastics	soft	220	22	
•	Nail, wire pin	medium-hard	750	75	
•	Wire rope strand, steel wire	hard	1800	180	
•	Spring steel wire	piano wire	2300	230	

The maximum values indicated always stay for the performance cutting conditions, when the wire is placed as near as possible to the joint.



Safety instructions



- >When using cutting pliers: beware of wire ends flying off. Wear protective goggles and if needed gloves. Be aware of bystanders.
- >Only handles marked with the symbol <u>A</u>1000 v are insulated.



Care Tips

A drop of oil on polished surfaces and in the joint will keep the tool in good working order and will increase the service life of your pliers.

STRUCTURE OF ARTICLE NUMBER HEAD/HANDLES

Basic model e. g. KNIPEX Cobra® Hightech Water Pump Pliers	Form e. g. straight	Finish e. g. head polished, handles with multi-	Length e. g. 250 mm	Accessory e. g. Tethered- Tools- Programm	0	Pliers black atramentized, head polished	O MAINTEN LANGED
87	0	component grips	250	Т	1	Head polished, handles plastic coated	
					2	Head polished, handles with multi-component grips	03 07 110
					3	Pliers chrome plated, handles plastic coated	Kuturk to 19 200
					4	Pliers chrome plated	(NNIDEX 99-250)
					5	Pliers chrome plated, handles with multi- component grips	03 03 180
					6	Pliers chrome plated, handles insulated with multi-component grips, VDE-tested DIN EN 60900 / IEC 6090	03 06 180 00 0 € 1000 V
					7	Pliers chrome plated, handles with dipped insulation, VDE-tested	KH1PEX 03 07 180 (11)
						DIN EN 60900 / IEC 6090	00

INDEX

New Products 2018
KNIPEX Pliers Wrenches4
KNIPEX Cobra®-Set4
Wire Rope Cutters5
KNIPEX CoBolt® S5
Hose Clamp Pliers6
Spring Hose Clamp Pliers6
KNIPEX Cobra®7
KNIPEX Cobra® QuickSet7
KNIPEX Cobra® ES8
KNIPEX SmartGrip®8
Multiple Slip Joint Spanner8
KNIPEX Alligator®9
KNIPEX Alligator® XL9
Cobra® Set9
Alligator® Set9
Bestseller-Set9
Oil filter- and Connector Pliers
KNIPEX TwinKey®10
Pliers Wrenches11
Pliers Wrench XL11
Set of pliers wrenches11
Precision Circlip Pliers13
Circlip Pliers14
Special Retaining Ring Pliers15
Precision Circlip Pliers Set
Circlip Pliers Sets
Pliers Sets
Circlip Pliers Sets - 4 and 8 parts
Ear Clamp Pliers
Halogen Bulb Exchange Pliers17
Upholstery Pliers
Long Reach Needle Nose Pliers
Needle-Nose Combination Pliers
Combination Pliers
Mechanics' Pliers
Snipe Nose Side Cutting Pliers
Long Nose Pliers
Grip Pliers21

rveiding Grip Pilers	2
Carpenters' Pincers	22
Farriers' Pincers (Tear-off Pliers for vehicle bodywork)	22
Concreters' Nippers	22
Nire Rope Cutters forged	22
KNIPEX CoBolt®	23
KNIPEX CoBolt® XL	23
Pipe Cutter	24
Anvil shears	24
Combination Shears	24
Diagonal Cutters	25
KNIPEX X-Cut®	25
High Leverage Diagonal Cutters	26
KNIPEX TwinForce®	26
KNIPEX StriX	27
nsulation Strippers	27
Pliers for Electrical Installation	27
Automatic Insulation Stripper	28
MultiStrip 10	28
Self-Adjusting Insulation Stripper	28
Crimping Pliers	29
Crimping Pliers	29
KNIPEX PreciForce® Crimping Pliers	29
KNIPEX MultiCrimp® — Crimping Pliers with changer magazine	30
Electronic Super Knips®	31
Electronic Super Knips® XL	31
Pliers ABC — Technical Basics	32
Cutting Edge — Technical Basics	33

It is not permissible to copy the catalogue or parts of it in any way without our approval.

Subject to model modifications and technical changes. Illustrations, dimensions and weights are just approximate.

No liability is assumed for misprints or errors. Printed in the Federal Republic of Germany.

KNIPEX-Werk C. Gustav Putsch KG

KNIPEX-Werk

C. Gustav Putsch KG

42337 Wuppertal Germany

Tel.: +49 202 47 94-0

Fax: +49 202 47 74 94 info@knipex.com www.knipex.com

Follow us on: You f







Your dealer