

KNIPEX Quality – Made in Germany



# KNIPEX Heating/ Plumbing Range

Further products on  
[www.knipex.com](http://www.knipex.com)

# Pliers for the heating/ plumbing trade

All plumbing, heating and air conditioning professionals use a wide range of tools in their everyday work. The one they reach for most frequently are pliers, because they can be used universally for diverse jobs. KNIPEX pliers have been improved by numerous advances, thereby enabling the professional to work quickly, easily and safely. The best example is our classic, the KNIPEX Cobra®. One of our innovations is the Cobra® Quick-Set. According to the motto "Fully open, push, grab!", it substantially speeds up the screwing process. The locking part engages securely as soon as the tool is under load, so that you can start unscrewing.





































The KNIPEX pliers wrench has been designed for work on quality screw connections made of brass, gunmetal or stainless steel or on chrome-plated fittings. It combines pliers and an open end wrench in one tool. There are six different sizes of pliers wrenches in the basic version for gripping wrench openings of up to 85 mm or 3 3/8".

The KNIPEX X-Cut® diagonal cutters have shown themselves to be an all-rounder that can be used to effortlessly cut anything from fine copper strand through to hard piano wire. When installing panel heating, the innovative pipe cutter for composite and protective pipes is the ideal tool.

Discover these and other pliers from our range for the heating/plumbing trade.



## SYMBOLS

	flat jaws		with lead catcher		electrostatic discharging, dissipative		soft wire
	half-round jaws		angle		electronics		medium hard wire
	round jaws		weight		VDE-tested, also in compliance with GPSG		hard wire
	flat and pointed jaws		length		insulated according to IEC 60900, usable up to 1000 V AC / 1500 V DC		piano wire
	box-joint		centre cutter		conforms to a European directive		Cu + Al-multi-conductor cable, solid and multi-stranded
	bolted joint		cutting edges with bevel		mechanically tested in accordance with the equipment and product safety act		wire rope
	smooth gripping surfaces		cutting edges with small bevel		WEEE marking (Waste Electrical and Electronic equipment Directive)		iron
	knurled gripping surfaces		cutting edges with very small bevel		ribbon cable		steel wire armoured cable (SWA)
	cross-hatched, knurled gripping surfaces		cutting edges without bevel				
	with opening spring		for flush cut of soft materials				



# New Products 2020



**KNIPEX Pliers Wrench | p. 8**

Less weight, more performance

86 01 300

**KNIPEX Cobra® XS | p. 6**

Now in a 100 mm model



87 00 100



**KNIPEX TubiX®  
Pipe Cutter | p. 4**

Faster, easier and more precise: cuts copper, brass and stainless steel pipes

90 31 02



**KNIPEX StepCut | p. 12**

Innovative step cut

95 11 160



**KNIPEX PreciStrip16 | p. 10**

Automatic Insulation Stripper

12 52 195

**Faster, easier and more precise: cuts copper, brass and stainless steel pipes**

**QuickLock one-hand locking mechanism: slide on, cut – finished!**

**Easy one-handed pushing for quick adjustment to different tube sizes**

**Comfortable: easy cutting due to high-quality needle bearings in the cutting wheel and guide rolls**

- > Cuts pipes from Ø 6 - 35 mm (1/4" - 1 3/8") with wall thickness up to 2 mm
- > Cutting wheel made of high-grade ball-bearing steel
- > Practical quick replace system for the cutting wheel – with spare wheel stored under the feeding barrel
- > With precision-ground deburring tool, easy to remove
- > For the electric trade: Also suitable to cut rigid steel conduits
- > Light and durable metal enclosure of magnesium



For cutting copper, brass, stainless steel pipes and rigid steel conduits with wall thickness up to 2 mm and diameters of 6-35 mm (1/4" - 1 3/8")

← The overall length does not change during operation →



90 31 02

**NEW**  
PAT. PEND.



The needle-bearing and spring-loaded cutting wheel made of high-quality ball bearing steel is easily exchangeable



The spring-loaded cutting wheel can be pushed and fixed on the diameter of the pipe with the one-hand locking mechanism



Speed in everyday operation: the QuickLock one-hand locking mechanism enables the cutting wheel to slide onto any pipe diameter with a single press of the thumb



High-quality needle bearings enable the cutting wheel and the four guide rollers to operate virtually without any friction during the cutting – cuts stainless steel pipes with particular ease

## Four steps to success – how the KNIPEX TubiX® pipe cutter helps you in your work



1 Cutting now made easy: position the opened KNIPEX TubiX® ...



2 Push the cutting wheel against the pipe with the QuickLock one-hand locking mechanism: fastest adjustment to different pipe diameters ...



3 Tighten and cut with a swift twist and then readjust using the ergonomic blue feeding barrel ...



4 And you're done! If necessary, have the edge smoothed out using the fold-out deburring tool – with surprisingly little effort

Artikel-Nr.	EAN 4003773-	↔ mm	Ø mm	Ø Inch	△ g
90 31 02 SB <b>N</b>	084686	180	6 - 35	1/4" - 1 3/8"	375
90 31 02 BK <b>N</b>	084907	180	6 - 35	1/4" - 1 3/8"	375
90 39 02 V01 <b>N</b>	085874	Cutting wheel INOX Cu for 90 31 02			8
90 39 02 V02 <b>N</b>	085881	Deburring tool for 90 31 02			7
90 39 02 V03 <b>N</b>	086307	5x Cutting wheel INOX Cu for 90 31 02			25



# KNIPEX TubiX® Pipe Cutter

Faster, easier and more precise cutting



## QuickLock one-hand locking mechanism:

Precise positioning,  
independent holding  
and clamping on  
the tube



# KNIPEX Cobra® XS

Only 100 mm in length:  
anything but a toy!



The slim head provides firm grip even in tight spaces



Gripping capacity  
**Ø 28 mm**



Work with only one hand: open, slide in, it fits!





**Grips like a big tool: The smallest water pump pliers in the world with full functional capability**

Optimum access in the narrowest spaces: an especially compact design with a very slim head

Single-handed fine adjustment by sliding for optimal fitting to various workpiece sizes

Long-lasting secure grip ensured by high wear resistance

- > Gripping capacity Ø 28 mm (1"), width across flats up to 24 mm – at only 100 mm length
- > Box joint: high quality and durability provided by dual guide
- > Gripping surfaces with specially hardened teeth, hardness approx. 60 HRC
- > Self-locking on pipes and nuts: no slipping on the workpiece and low handforce required
- > Pinch guard prevents operators' fingers being pinched
- > Fine adjustment with 11 adjustment positions
- > DIN ISO 8976

**NEW**  
PAT. PEND.



87 00 100

**The KNIPEX Cobra® Family has grown**

In every size: perfect tightening, gripping, holding, pressing and bending with the ingenious self-locking effect



87 00 100

87 01 125

87 01 150

87 01 180

87 01 250

87 01 300

87 01 400

87 01 560



Self-locking and durable – all part of genuine KNIPEX water pump pliers



The KNIPEX Cobra® XS grips nuts up to 24 mm and other workpieces as large as Ø 28 mm



Naked truth: The grips are not coated to keep them as slim as possible. To ensure good grip, they are textured on the outside

Article No.	EAN	↔		Pliers	Head	Handles	Adjustment positions	∅ Inch	∅ mm	g
	4003773-	mm								
87 00 100	085836	100		grey atramentized	polished	embossed, rough surface	11	1	24	62
87 00 100 BK	085843	100				embossed, rough surface	11	1	24	87
87 01 125	069935	125				with non-slip plastic coating	13	1	27	85
87 01 150	060116	150					11	1 1/4	30	145
87 01 180	022015	180					18	1 1/2	36	170
87 01 250	022022	250					25	2	46	335
87 01 300	034087	300					30	2 3/4	60	530
87 01 400	005636	400					27	3 1/2	95	1214
87 01 560	044321	560					20	4 1/2	120	2750

**Now optimised: Less weight, more performance, with a larger opening width and a practical laser-cut adjustment scale**


**Higher capacity: Continuous gripping in all wrench sizes up to 68 mm (maximum 2 1/2") with use of two additional adjustment positions**

**Noticeably less weight, 80 grams lighter with the same stability**

**Practical adjustment scale: A laser-cut (metric and imperial) enables pre-setting to the width across flats**

- > Replaces a whole set of spanners – metric and imperial
- > Smooth jaws for damage-free installation of plated fittings - working directly on chrome!
- > Reliable catching of the hinge bolt: no unintentional shifting
- > Lever transmission greater than 10:1 for strong gripping power
- > Chrome vanadium electric steel, forged, oil-hardened

**For especially sensitive surfaces:**  
plastic protective jaw covers are available as accessories for all optimised pliers wrenches

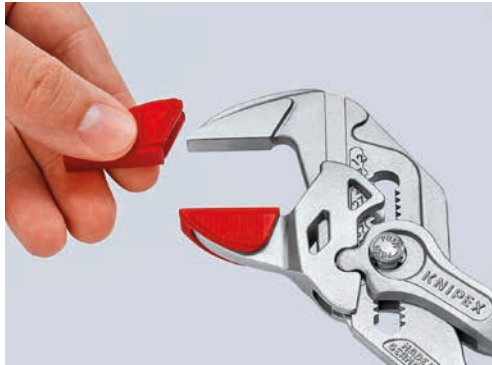

**Even better:  
the optimised pliers wrench**

The new versions of the tried-and-tested pliers wrench. You will recognise them **1** by the offset jaws, **2** the laser-cut scale for pre-setting of width across flats



86 01 180 and  
86 03 180



86 01 250 and  
86 03 250

86 01 300 and  
86 03 300

Article No.	EAN 4003773-	↔ mm		Pliers	Head	Handles	Adjustment positions	↔ Inch	↔ mm	g
86 01 180	N 084273	180	□	grey atramentized	polished	with non-slip plastic coating	15	1 ½	40	230
86 01 180 SB	N 084303	180	□	grey atramentized	polished	with non-slip plastic coating	15	1 ½	40	230
86 01 250	082385	250	□	grey atramentized	polished	with non-slip plastic coating	19	2	52	457
86 01 250 SB	082637	250	□	grey atramentized	polished	with non-slip plastic coating	19	2	52	457
86 01 300	N 084662	300	□	grey atramentized	polished	with non-slip plastic coating	24	2 ½	68	645
86 01 300 SB	N 084679	300	□	grey atramentized	polished	with non-slip plastic coating	24	2 ½	68	645
86 02 180	N 084280	180	□	grey atramentized	polished	with multi-component grips	15	1 ½	40	240
86 02 180 SB	N 084310	180	□	grey atramentized	polished	with multi-component grips	15	1 ½	40	240
86 02 250	082392	250	□	grey atramentized	polished	with multi-component grips	19	2	52	468
86 02 250 SB	082644	250	□	grey atramentized	polished	with multi-component grips	19	2	52	468
86 03 180	U 035466	180	□	chrome plated		plastic coated	15	1 ½	40	230
86 03 180 SB	U 028819	180	□	chrome plated		plastic coated	15	1 ½	40	230
86 03 250	033837	250	□	chrome plated		plastic coated	19	2	52	462
86 03 250 SB	022091	250	□	chrome plated		plastic coated	19	2	52	462
86 03 300	U 041429	300	□	chrome plated		plastic coated	24	2 ½	68	645
86 03 300 SB	U 040927	300	□	chrome plated		plastic coated	24	2 ½	68	645
86 05 180	U 047162	180	□	chrome plated		with multi-component grips	15	1 ½	40	250
86 05 180 SB	U 052180	180	□	chrome plated		with multi-component grips	15	1 ½	40	250
86 05 250	047841	250	□	chrome plated		with multi-component grips	19	2	52	485
86 05 250 SB	052029	250	□	chrome plated		with multi-component grips	19	2	52	485
86 06 250	082408	250	□	chrome plated		insulated with multi-component grips, VDE-tested	19	2	52	515
86 06 250 SB	082651	250	□	chrome plated		insulated with multi-component grips, VDE-tested	19	2	52	515
86 09 180 V01	N 085805	3 pairs of plastic jaws for all 86 XX 180 mm models (models from 2019)								9
86 09 250 V01	084143	3 pairs of plastic jaws for all 86 XX 250 mm models (models from 2018)								18
86 09 300 V01	N 085812	3 pairs of plastic jaws for all 86 XX 300 mm models (models from 2020)								24



# All advantages of the optimised pliers wrenches at a glance:

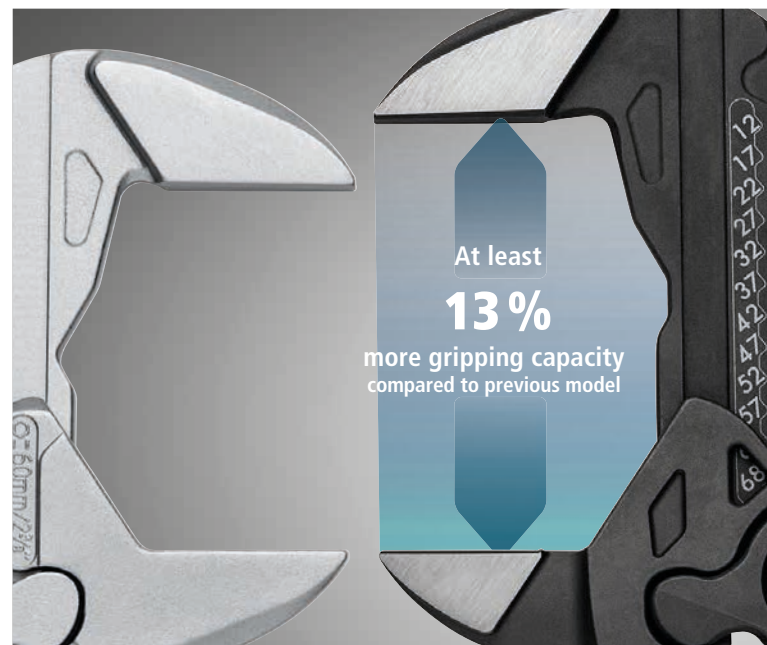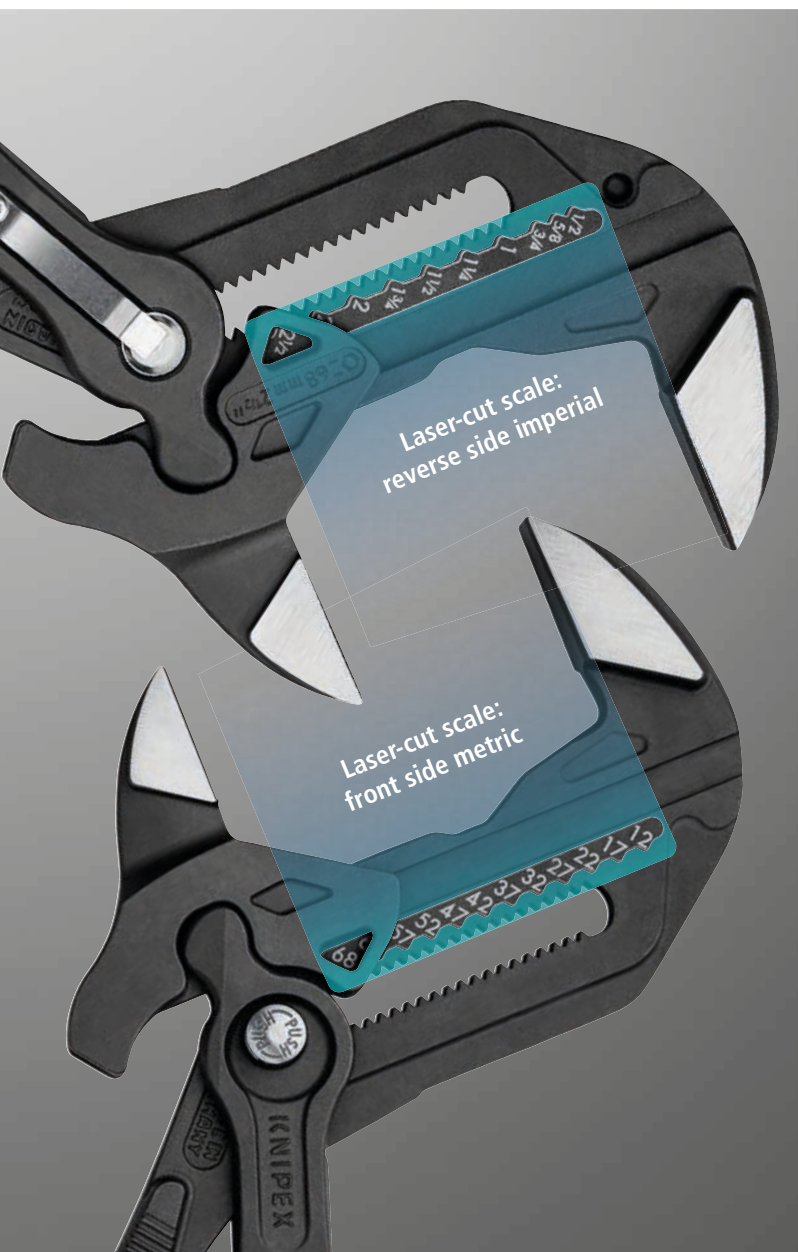



Capacity of  
0.08–16 mm<sup>2</sup>

## KNIPEX PreciStrip 16

Automatically strips insulation – and thanks to additional zero correction, it also grips where automatic devices would otherwise fail



**Properly stripped away:**  
with deft precision, strip everything from very fine to thick cables with stranded or solid conductors

Simple, precise stripping of fine stranded and solid round cables with a wide capacity range from 0.08 to 16 mm<sup>2</sup> with only one pair of pliers

Good grip provided by semi-circular grooved metal holding clamps and exact cut from parabolic stripping blade


Fine adjustable zero correction of the blade setting to special material requirements, e.g. due to large temperature differences

- > With cable cutter for stranded wire from 0.08 to 16 mm<sup>2</sup>
- > With tether attachment point, suitable for KNIPEX Tethered Tools accessories
- > Inscription area for customisation
- > With adjustable length stop for precision work repeated accurately each time
- > Comfortable operation with ergonomic dual-component handle
- > Easily replaceable blade cassette

**NEW**  
PAT. PEND.



12 52 195




Parabolic blade separates the insulation first and then automatically pulls it back



Customisable using the inscription area

**How parabolic blades work**  
The parabolic bulging blade pair (red) extensively encloses and cuts the insulation and is thus suitable for many flexible materials

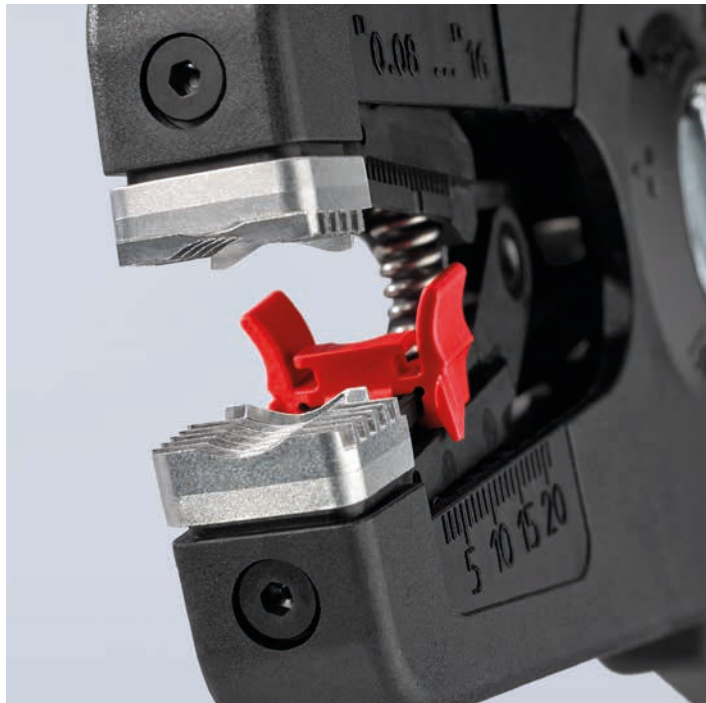

Semi-circular grooved holding clamp for better grip that holds practically any insulation material securely in place



With cable cutter on the top side for up to 16 mm<sup>2</sup>



For special requirements, such as particularly hard or soft insulation materials, optimum fine adjustments can be made using the adjustment wheel with its tactile locking positions

Article No.	EAN 4003773-	↔ mm	⊗ mm <sup>2</sup>	⊗ AWG	⚖ g
12 52 195	<b>N</b> 085829	195	0.08 - 16	28 - 6	180
12 52 195 SB	<b>N</b> 085997	195	0.08 - 16	28 - 6	180
12 49 31	<b>N</b> 086000	Spare blade pair for 12 52 195			10

# KNIPEX StepCut

Additionally hardened, precision-ground blades:  
lighter, cleaner cut without crushing

Innovative  
step cut





**Cable cutting made easy: innovative step cutting separates wires one by one to save energy**

**Small, light, strong: comfortable cutting without crushing and just 160 mm in size**

**Noticeably less effort: the gradations cut wires one after the other; cutting is up to 40 % easier than with standard cable shears of the same length!**

**Ergonomic handle design: optimal cutting feel even for larger cable diameters**

- > Cuts multi-core stranded copper and aluminium cables up to Ø 15 mm (50 mm<sup>2</sup>)
- > Cuts solid copper and aluminium cables up to 5 x 4 mm<sup>2</sup>
- > Cuts without crushing
- > Bolted joint: precise, effortless, durable
- > Pinch guard fitted for safe work
- > Not suitable for steel wire and hard drawn copper conductors
- > Cutting edges additionally induction-hardened, cutting edge hardness at least 56 HRC
- > High-grade special tool steel, forged, oil-hardened

**NEW**  
PAT. PEND.



95 11 160




95 12 160



95 16 160

The gradations cut wires one after the other, without crushing

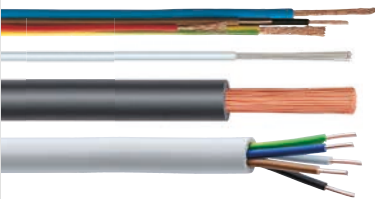

Cuts solid Cu- and Al-cable up to 5 x 4 mm<sup>2</sup>



Bolted joint: precise, smooth-running, durable; with pinch guard

Article No.	EAN 4003773-	↔ mm	Werkzeug	Griffe	Cutting capacities				
					⊘ mm	mm <sup>2</sup>	AWG	⚖ g	
95 11 160	085904	160	burnished	plastic coated	15,0	50	1 / 0	180	
95 11 160 SB	085911	160	burnished	plastic coated	15,0	50	1 / 0	205	
95 12 160	085928	160	burnished	with multi-component grips	15,0	50	1 / 0	220	
95 12 160 SB	085935	160	burnished	with multi-component grips	15,0	50	1 / 0	245	
95 16 160	085966	160		chrome plated	insulated with multi-component grips, VDE-tested	15,0	50	1 / 0	225
95 16 160 SB	085898	160		chrome plated	insulated with multi-component grips, VDE-tested	15,0	50	1 / 0	250

**Tiny titan with 25-fold leveraging of hand strength –  
just right for round material**

Heavy-duty cutting edge with recess slices through the hardest round materials in only one cutting action

Extremely high cutting performance in a convenient length of 160 mm

Small, slim head for excellent accessibility

- > Compact and powerful: cuts bolts, nails, rivets etc. up to Ø 4.8 mm
- > Cutting edge hardness approx. 64 HRC
- > Less physical effort due to efficient lever action mechanism
- > Slippage of cutting material reduced by lasered cutting edge
- > With gripping surface below the joint for gripping and pulling wires from Ø 1.0 mm
- > Blades with recess for easier cutting of larger cross-sections thanks to better leverage close to the fulcrum
- > Chrome vanadium heavy-duty steel, forged, multi stage oil-hardened



**NEW**

With recess in the cutting edge



71 31 160

**Ideal for round materials:  
the KNIPEX CoBolt® with recess**

The recess enables round materials to be placed closer to the joint when cutting. The improved leverage makes easy work of cutting through even very hard materials with less effort.

Available in lengths of  
160 mm – item no. 71 31 160  
200 mm – item no. 71 31 200  
250 mm – item no. 71 31 250



**Ideal for flat materials:  
the KNIPEX CoBolt® without recess**

The cutting edge without the recess provides optimum cutting for flat materials. The lasered cutting edge also keeps the cutting material from slipping.

Available in lengths of  
160 mm – item no. 71 01 160  
200 mm – item no. 71 01 200  
250 mm – item no. 71 01 250



Article No.	EAN 4003773-	↔ mm	Pliers	Handles	Cutting capacities				⚖ g
					Ø mm	Ø mm	Ø mm	Ø mm	
71 31 160 <b>N</b>	084587	160	▶▶ grey atramentized	plastic coated	5.3	4.8	3.6	3.3	195
71 31 160 <b>SB N</b>	085850	160	▶▶ grey atramentized	plastic coated	5.3	4.8	3.6	3.3	195



## Pipe Cutter for plastic composite pipes

90

**Clean cut: cuts aluminium composite and plastic pipes with great precision**

For cutting composite pipes from Ø 12 - 25 mm

Clean, smooth and burr-free cut surfaces

Easily exchangeable blades

- > With opening spring and locking device
- > Ergonomically shaped handles made of fibreglass-reinforced plastic
- > Not suitable for cutting cables
- > Blade made of high-strength special grade steel, oil-hardened and tempered



Article No.	EAN 4003773-	↔ mm	Cutting capacities Ø mm	⚖ g
90 25 185	084839	185	12 - 25	175
90 25 185 SB	086093	185	12 - 25	175
90 29 01	031932	Spare blade		24



90 25 185



The high-strength, sharp blade cuts composite and plastic pipes smoothly and free of burr

## Pipe Cutter for multilayer and pneumatic hoses

90

**Perfect cutting results: the hose and pipe cutter for professional users**

Ideal for all liquid, multilayer and pneumatic hoses/pipes commonly available on the market in the wide application range from Ø 4 - 20 mm

With universal support for right-angled positioning

Easy on the hands even in continuous use thanks to low force required and automatic opening thanks to the spring mechanism

- > Easily exchangeable blades
- > With opening spring and locking device
- > Ergonomically shaped handles made of fibreglass-reinforced plastic
- > Not suitable for cutting cables
- > Blade made of high-strength special grade steel, oil-hardened and tempered



Article No.	EAN 4003773-	↔ mm	Cutting capacities Ø mm	⚖ g
90 10 185	084846	185	4 - 20	175
90 10 185 SB	086086	185	4 - 20	175
90 29 01	031932	Spare blade		24



90 10 185

The wide support lips automatically align pipes perfectly at right angles to the blade



Thanks to the ergonomic handles, smooth joint and the opening spring, you can cut flexible pipes or pneumatic hoses with little effort

# Tool Case "BIG Basic Move" Plumbing

00  
21

**NEW**

The basic mobile tool kit for sanitary, heating and air-conditioning professionals


Equipped with four KNIPEX tools, a total of 31 brand tools, partly VDE-tested according to DIN EN 60900

Telescopic handle set in the base as well as two external, smooth-running skater wheels

Two metal flip locks and a three-digit combination lock for secure locking of the cover

- > Strong, ergonomic handle
- > heavy duty ABS material, black
- > Circumferential aluminium frame
- > Metal hinges
- > Document compartment in the cover

00 21 06 HK S

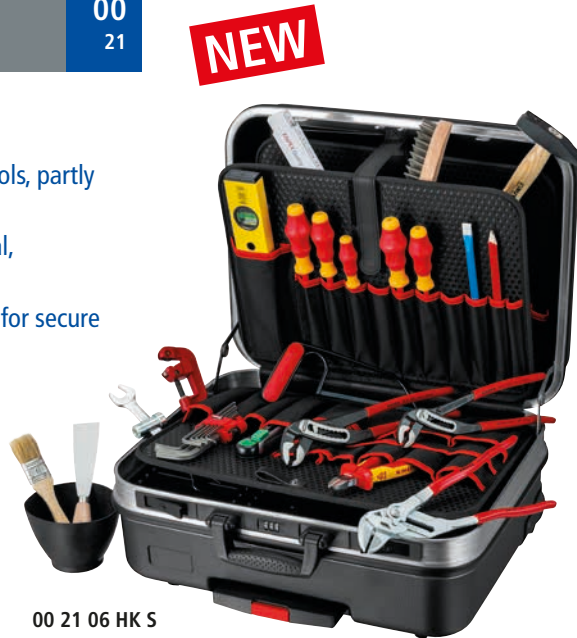

with two smooth castors



Extendable telescopic handle

## Contents

70 06 160 KNIPEX		2 x Wera		Heyco		Rennsteig	
86 03 250 KNIPEX		Ruthe		Haunstätter		Stabila	
88 01 250 KNIPEX		Picard		Heyco		Stabila	
88 01 300 KNIPEX		Stabila		Picard		9-piece Wera	
3 x Wera		Picard		Picard		Zenten	

Artikel-Nr.	EAN				Anzahl	Quantity Nominal size	g
00 21 06 HKS	N 4003773-070825			Tool Case "BIG Basic Move" Plumbing 31 pcs.			9800
		⚠ 1000V	70 06 160	Diagonal Cutter	KNIPEX	1 160 mm	
			86 03 250	Pliers Wrench		1 250 mm	
			88 01 250	KNIPEX Alligator®, Water Pump Pliers		1 250 mm	
			88 01 300			1 300 mm	
		⚠ 1000V		Screwdrivers for slotted screws, 1160i	Wera	1 0.6 x 3.5 x 100 mm	
						1 1.0 x 5.5 x 125 mm	
						1 1.2 x 6.5 x 150 mm	
		⚠ 1000V		Screwdrivers for cross recessed Phillips® screws, 1162i		1 PH1 x 80 mm	
						1 PH2 x 100 mm	
				Set of hex key wrenches		9 1.5 - 10 mm	
				Locksmith's hammer	Ruthe	1 300 g	
				Flat brush		1 40 mm	
				Steel wire brush, 5-row	Picard	1 280 mm	
				Painter's spatula		1 40 mm	
				Plasterer's bowl		1 125 x 90 mm	
				Spirit level type 70	Stabila	1 30 cm	
				Wooden folding rule type 607N		1 2 m	
				Carpenter's pencil	Stabila	1 24 cm	
				Professional blades blade, zinc die casting	Heyco	1 170 mm; 18 mm	
				Express key		1 17 x 19 mm; M 10	
				PUK® Junior Hacksaw	Haunstätter	1 150 x 240 mm	
				Electrician's Chisel	Rennsteig	1 250 x 10 mm	
				Pipe cutter	Zenten	1 3 - 35 mm / 1/8 - 1 1/2"	
00 21 06 LE	N 057512			Tool Case "BIG Basic Move", empty			6200



Replaces the need for sets of metric and imperial spanners

Smooth jaws for damage free installation of plated fittings - working directly on chrome!






- > Also excellent for gripping, holding, pressing and bending workpieces
- > Zero backlash jaw pressure prevents damage to edges of sensitive components
- > Push the button for adjustment on the workpiece
- > Parallel jaws give a more solid grip; its design allows flexible adjustment of all widths up to the specified maximum size
- > Reliable catching of the hinge bolt: no unintentional shifting
- > The ratchet type principle allows quick and easy tightening and release of all bolted connections
- > Lever transmission greater than 10 : 1 for strong gripping power
- > Chrome vanadium electric steel, forged, oil-hardened



**86 03 125**  
**The mini pliers wrench:**  
 Particularly suitable for working on small bolted connections. Excellent access in very confined areas.



**86 03 400:** For opening widths up to 85 mm / 3 3/8"

Article No.	EAN 4003773-	Adjustment positions	 Inch	 mm	 mm
<b>86 03 125</b>	077497	11	7/8	23	125
<b>86 03 150</b>	069676	14	1	27	150
<b>86 03 180</b> 	035466	15	1 1/2	40	180
<b>86 03 250</b>	033837	19	2	52	250
<b>86 03 300</b> 	041429	24	2 1/2	68	300
<b>86 03 400</b>	077312	25	3 3/8	85	400
<b>86 43 250</b>	081296	17	1 3/4	46	250



86 03 125



86 03 150



86 03 180



86 03 250



86 03 300



86 03 400



86 43 250

**86 43 250:**  
 15° angled pliers handle provides space for counter screw connections or bolted fittings on surfaces; Reduced risk of knuckle injuries



- > Push the button for adjustment on the workpiece
- > Fine adjustment for optimum adaptation to different sizes of workpieces and a comfortable handle width
- > Self-locking on pipes and nuts: no slipping on the workpiece and low handforce required
- > Gripping surfaces with special hardened teeth, teeth hardness approx. 61 HRC: high wear resistance and stable gripping
- > Box-joint design for high stability due to double guide
- > Reliable catching of the hinge bolt: no unintentional shifting
- > Guard prevents operators' fingers being pinched
- > Chrome vanadium electric steel, forged, multi stage oil-hardened



Article No.	EAN 4003773-	Adjustment positions	Ø Inch	Ø mm	mm	mm
87 01 125	069935	13	1	29	27	125
87 01 150	060116	11	1 1/4	32	30	150
87 01 180	022015	18	1 1/2	42	36	180
87 01 250	022022	25	2	50	46	250
87 01 300	034087	30	2 3/4	70	60	300
87 01 400	005636	27	3 1/2	90	95	400
87 01 560	044321	20	4 1/2	115	120	560

**Cobra® XL (87 01 400):**  
Greater gripping capacity but much lower weight than comparable pipe wrenches. Large gripping capacity of 95 mm, which requires a 3-inch pipe wrench.



**KNIPEX Mini pliers sets**  
in belt tool pouch

00  
20

- > Tool bag made of tough polyester fabric, with velcro fastening and belt loop
- > Attractive cardboard packaging with Euro standard perforation
- > Dimensions (W x H x D): 70 x 170 x 50 mm
- > With elastic side holder for small flash lamp, pen or suchlike

Article No.	EAN 4003773-	Content
00 20 72 V01	070832	86 03 150 Mini Pliers Wrench 87 01 125 Cobra® Hightech Water Pump Pliers
00 20 72 V02	075851	74 01 160 High Leverage Diagonal Cutter 87 01 150 Cobra® Hightech Water Pump Pliers



00 20 72 V01



00 20 72 V02

**Tool Kits**

00  
20

**Cobra® Set**

Article No.	EAN 4003773-	Content
00 20 09 V02	074793	87 01 180 87 01 250 87 01 300



**Bestseller Set**

Article No.	EAN 4003773-	Content
00 20 09 V01	073994	03 02 180 70 02 160 87 01 250



## KNIPEX Cobra® QuickSet

Hightech Water Pump Pliers

87  
2

Fully open, push, grab!

Additional fast adjustment on the workpiece by sliding the pliers handle

- > Combines the proven, reliable locking of the hinge bolt with an additional push function which makes it easier to work in very confined and inaccessible areas
- > The adjustment directly on the workpiece is possible by simply sliding the pliers handle
- > Reliable locking of the hinge bolt with the first workload. The gripping width of the pliers is then fixed and can only be adjusted by pressing the button.
- > To re-activate the sliding function, the hinge bolt must be released by pressing the push button and the pliers must be completely opened again
- > Chrome vanadium electric steel, forged, multi stage oil-hardened



87 21 250

PATENTED



QuickSet

Article No.	EAN 4003773-	Adjustment positions	Ø Inch	Ø mm	mm	mm
87 21 250	072775	25	2	50	46	250
87 21 300	078524	25	2 3/4	70	60	300
87 22 250	077794	25	2	50	46	250

## KNIPEX Cobra® ES

Water Pump Pliers extra-slim

87  
5

- > Ideal for service, maintenance and equipment repair
- > Long, narrow jaws
- > Particularly good access to the workpiece due to very slim construction of head and joint area
- > Firm grip also on flat material due to three-point rest
- > Push the button for adjustment on the workpiece



Article No.	EAN 4003773-	Adjustment positions	Ø Inch	Ø mm	mm	mm
87 51 250	061267	19	1 1/4	32	34	250

## Multiple Slip Joint Spanner

87  
4

- > For metric and imperial nuts and screws with widths across flats from 10 to 32 mm (3/8" up to 1 1/4"); self-locking from 17 mm: no slipping on the workpiece
- > Zero-backlash gripping of metric or imperial hexagonal headed screws, no rounding of bolt heads
- > Reliable and tight gripping of rounded, rusty, or thick coated bolts and screws



PATENTED

Article No.	EAN 4003773-	Adjustment positions	Ø Inch	Ø mm	mm
87 41 250	054566	15	3/8 - 1 1/4	10 - 32	250

## KNIPEX SmartGrip®

Water Pump Pliers with automatic adjustment

85

- > Ideal for frequent changeovers to workpieces of different sizes
- > Automatic adjustment per one-hand operation both for right-handed and left-handed use
- > Good access to the workpiece thanks to the slim dimensions of head and joint area and flush joint bolt
- > Self-locking on pipes and nuts: no slipping on the workpiece and low handforce required



PATENTED

Article No.	EAN 4003773-	Ø Inch	Ø mm	mm	mm
85 01 250	061304	1 1/4	32	36	250

## Siphon- and Connector Pliers

81

For siphons, oil filters, plastic pipes and connectors up to 80 mm diameter

Fine adjustment for ideal adjustment to diverse diameters

- > Ideal for tightening and loosening siphon screw connections, plastic pipe fittings and round union nuts
- > For connectors and couplings with screw connection, such as Cannon circular connectors
- > For gentle loosening of hoses on nozzles
- > 25 adjustment positions, box-joint design

### 81 01 250 / 81 03 250

- > With serrated gripping jaws; up to  $\varnothing$  80 mm

### 81 11 250 / 81 13 250

- > With exchangeable plastic jaws for sensitive surfaces; up to  $\varnothing$  75 mm



81 11 250

Article No.	EAN 4003773-		Working Capacity $\varnothing$ mm	Adjustment positions	$\longleftrightarrow$ mm
81 01 250	078463		25 – 80	25	250
81 03 250	078487		25 – 80	25	250
81 11 250	078470		10 – 75	25	250
81 13 250	078494		10 – 75	25	250
81 19 250 V01	086550		2 pairs of plastic inserts 1C for 81 11 250 / 81 13 250		
81 19 250 V02	078500		2 pairs of plastic inserts 2C for 81 11 250 / 81 13 250		

## KNIPEX Alligator®

Water Pump Pliers

88

More output and comfort compared to conventional water pump pliers of the same length: 9-notch adjustment positioning for 30% more gripping capacity

Good access to the workpiece due to slim size of head and joint area

- > Self-locking on pipes and nuts: no slipping on the workpiece and low handforce required
- > Gripping surfaces with special hardened teeth, teeth hardness approx. 61 HRC: high wear resistance and stable gripping
- > Box-joint design for high stability due to double guide
- > Robust construction, insensitive to dirt; particularly suitable for outdoor work
- > Guard prevents operators' fingers being pinched
- > Chrome vanadium electric steel, forged, multi stage oil-hardened



88 01 250

88 01 400

Article No.	EAN 4003773-	Adjustment positions	$\varnothing$ Inch	$\varnothing$ mm	mm	$\longleftrightarrow$ mm
88 01 180	035480	9	1 1/2	42	36	180
88 01 250	022992	9	2	50	46	250
88 01 300	034094	9	2 3/4	70	60	300
88 01 400	075844	11	3 1/2	90	95	400

## KNIPEX Alligator® Set

Article No.	EAN 4003773-	Content
00 20 09 V03	074809	1 x 88 01 180 1 x 88 01 250 1 x 88 01 300





## Pipe Wrenches 90°

83  
10

- > Swedish pattern
- > 90° angled jaws
- > Jaws with offset teeth in opposite direction
- > Teeth additionally induction hardened
- > I-beam handle design
- > Captive adjusting nut
- > Red powder coated, jaws bright ground
- > Chrome vanadium electric steel, forged, multi stage oil-hardened



83 10 015

Article No.	EAN 4003773-	Ø Inch	Ø mm	Ø Inch	mm	↔ mm
83 10 010	014188	1 5/8	42	1	42	310
83 10 015	014195	2 3/8	60	1	60	420
83 10 020	014201	2 3/4	70	2	70	560

## Pipe Wrenches 45°

83  
20

- > Swedish pattern
- > 45° angled jaws
- > Jaws with offset teeth in opposite direction
- > Teeth additionally induction hardened
- > I-beam handle design
- > Captive adjusting nut
- > Red powder coated, jaws bright ground
- > Chrome vanadium electric steel, forged, multi stage oil-hardened



83 20 015

Article No.	EAN 4003773-	Ø Inch	Ø mm	Ø Inch	mm	↔ mm
83 20 010	014218	1 5/8	42	1	42	320
83 20 015	014225	2 3/8	60	1	60	430
83 20 020	014232	2 3/4	70	2	70	570

## Pipe Wrenches S-Type

83  
30

- > Slim, S-type jaw
- > Jaws with offset teeth in opposite direction
- > Teeth additionally induction hardened
- > Three-point contact on pipes, self-locking
- > I-beam handle design
- > Captive adjusting nut
- > Red powder coated, jaws bright ground
- > Chrome vanadium electric steel, forged, multi stage oil-hardened



83 30 015

Article No.	EAN 4003773-	Ø Inch	Ø mm	Ø Inch	↔ mm
83 30 010	014249	1 5/8	42	1	320
83 30 015	014256	2 3/8	60	1	420
83 30 020	014263	2 3/4	70	2	540

## Pipe Wrenches S-Type with fast adjustment

83  
6

- > Time-saving, precise adjustment of the gripping width directly on the workpiece at the push of a button
- > Less effort required due to self-locking action
- > No unintentional shifting of the pliers handles
- > Guard prevents operators' fingers being pinched
- > Maximum load capability thanks to completely hardened handles
- > High wear resistance due to the additionally hardened teeth
- > Chrome vanadium electric steel, forged, multi stage oil-hardened



83 61 010

Article No.	EAN 4003773-	Ø Inch	Ø mm	Ø Inch	↔ mm
83 60 010	075424	1 5/8	42	1	330
83 60 015	075677	2 3/8	60	1	420
83 60 020	078838	2 3/4	70	2	560
83 61 010	077602	1 5/8	42	1	330
83 61 015	077619	2 3/8	60	1	420
83 61 020	078876	2 3/4	70	2	560

## KNIPEX TwinKey®


for all standard cabinets and shut-off systems

00  
1

10 profiles. 2 crosses. 1 key.


All common locking systems

- > Multifunctional key for the actuation of locking systems from the areas of facilities engineering (heating and sanitation, air conditioning, electro technology), gas and water supply and shut-off-systems
- > 8-arm version: two 4-way spider keys connected in a space-saving way using magnets
- > Reversible bit: 1.0 x 7 mm slot and PH2 cross slot
- > Key and reversible bit joined by stable stainless steel wire

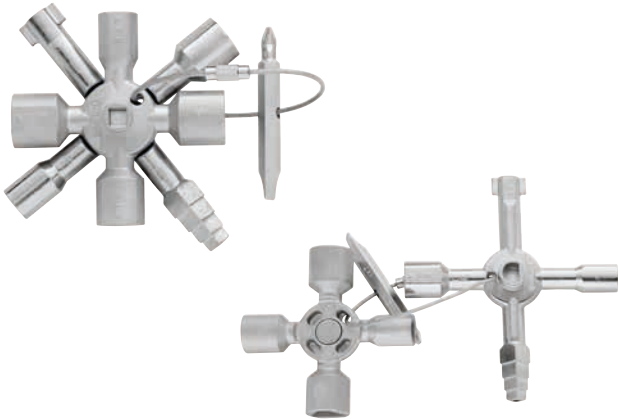

PATENTED

Article No.	EAN 4003773-	mm	mm	mm	mm	mm	mm
00 11 01	074670	5 / 6 – 7 / 8 – 9 / 10 – 11	7 – 8 / 9 – 10 / 11 – 12	3 – 5	6	6 – 9	95

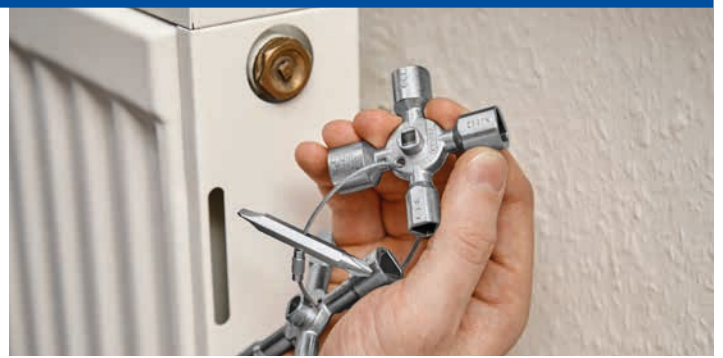

## Pipe Cutter

for plastic conduit pipes and hoses

90  
2

- > For cutting thin walled plastic pipes (conduit plastic pipes) and flexible hoses, also with fabric reinforcement, of plastic and rubber up to Ø 25 mm / 1"
- > Not suitable for cutting cables
- > With opening spring and locking device
- > Tool body: plastic, fibreglass-reinforced
- > Blades: special tool steel, oil-hardened, interchangeable



Article No.	EAN 4003773-	Cutting capacities Ø mm	mm
90 20 185	067122	25	185

## Pipe Cutter

for plastic conduit pipes

94

- > For clean cutting of plastic pipes (e.g. plastic conduit pipes) with Ø 6 – 35 mm
- > Not suitable for cutting cables
- > Blade is replaceable and can be retracted from any position
- > Low force requirement due to special blade geometry and optimum transmission
- > Minimum operator fatigue due to ergonomic handle design and incremental ratchet blade feed
- > Housing: die-cast aluminium, red lacquered



Article No.	EAN 4003773-	Cutting capacities Ø mm	Cutting edge length mm	mm
94 10 185	047025	6 – 35	35	185



## Pipe Cutter

for composite pipes and protective tubes

90

- > For cutting composite pipes with diameters from 12.0 to 25.0 mm and for cutting flexible protective tubes with a diameter of 18.0 – 35.0 mm without damaging a potential pipe inside
- > A calibration arbor can be fitted, for example for Geberit composite pipes with 11.5 and 15.0 mm dia.
- > Tool body: high-grade chrome vanadium electric steel, oil-hardened



Article No.	EAN	Cutting capacities composite pipes Ø mm	Cutting capacities protective tubes Ø mm	↔ mm
90 25 20	4003773-046004	12 – 25	18 – 35	210

## Pipe Cutter

for composite and plastic pipes

90

- > For cutting thick walled plastic and composite pipes with diameters from 26.0 to 40.0 mm
- > Cuts pipes using the ratchet principle in several strokes
- > Self-adapting pipe support positions pipes of various diameters correctly for a rectangular cut



Article No.	EAN	Cutting capacities Ø mm	↔ mm
90 25 40	4003773-045182	26 – 40	210

## Tile Breaking Pliers

91

For the precise cutting (breaking) of tiles and porcelain stoneware after scoring with a tile cutter

Ideal for long and thick tiles

- > Ideal protection of tiles against damage: replaceable positioning jaw made from soft, stable plastic
- > Great crushing force thanks to 10-fold increase of manual force
- > Easily adjusted to the required tile thickness at the press of a button
- > Chrome vanadium electric steel, forged, oil-hardened



Plastic positioning jaw: tilting for a clean break line and optimum protection of the tiles against damage



Article No.	EAN		↔ mm
91 13 250	4003773-079538		250
91 19 250 01	079545	Spare jaw for 91 13 250	



## Needle-Nose Combination Pliers

08

Handy use when working in confined areas thanks to slim head design and pointed jaws (anti-twist)

Gripping surfaces with special convex contour on one side for secure gripping of flat parts

Milled groove in the gripping area permits small parts such as nails, pins and bolts to be held and pulled

- > The reliable and diverse combination pliers when out and about
- > Easy cutting thanks to the high leverage joint
- > With cutting edges for soft, medium-hard and hard wire
- > Long service life and stable tips
- > Forged from special high grade tool steel, manifold oil-hardened



08 21 145



08 22 145



08 25 145

Article No.	EAN 4003773-	Ø mm	Ø mm	Ø mm	mm <sup>2</sup>	↔ mm
08 21 145	078951	3	2	8	16	145
08 22 145	078968	3	2	8	16	145
08 25 145	078975	3	2	8	16	145
08 26 145	079361	3	2	8	16	145



Milled groove in the gripping area



Firm grip also on flat material due to three-point rest



Tip keeps its shape even during greater torsional forces

## Combination Pliers

03

- > With gripping zones for flat and round material, suitable for versatile use
- > With cutting edges for soft and hard wire
- > Long cutting edges for thicker cables
- > Cutting edges additionally induction hardened, cutting edge hardness approx. 60 HRC
- > Special tool steel, forged, multi stage oil-hardened

Article No.	EAN 4003773-	Ø mm	Ø mm	Ø mm	mm <sup>2</sup>	↔ mm
03 02 160	023203	3.1	2.0	10.0	16.0	160
03 02 180	023197	3.4	2.2	12.0	16.0	180
03 02 200	034940	3.8	2.5	13.0	16.0	200
03 06 200	033776	3.8	2.5	13.0	16.0	200



03 02 180



## High Leverage Combination Pliers

02

35% less effort required than with conventional combination pliers  
With cutting edges (hardness approx. 63 HRC) for heavy duty

- > Easier work due to optimised leverage
- > Easier cutting, powerful gripping, bending and pulling
- > Long cutting edges for thicker cables
- > With gripping zones for flat and round material, suitable for versatile use
- > High-grade special tool steel, forged, multi stage oil-hardened



02 02 180


Article No.	EAN 4003773-	Ø mm	Ø mm	Ø mm	mm <sup>2</sup>	↔ mm
02 02 180	034896	2.5	2.0	11.5	16.0	180
02 02 200	034902	2.8	2.2	13.0	25.0	200
02 02 225	043379	3.0	2.5	14.0	25.0	225



## Diagonal Cutters

70

- > The indispensable diagonal cutter for all-round use
- > High-quality material and precise workmanship for long service life
- > Precision cutting edges for soft and hard wire
- > Clean cutting of thin copper wires, also at the cutting-edge tips
- > Cutting edges additionally induction hardened, cutting edge hardness approx. 62 HRC
- > Narrow head style for use in confined areas
- > Vanadium electric steel, forged, multi stage oil-hardened

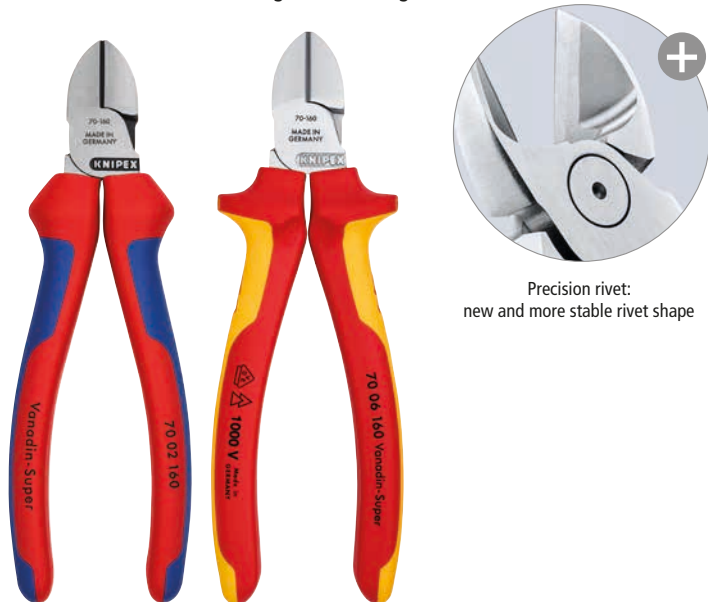

Precision rivet:  
new and more stable rivet shape

Article No.	EAN 4003773-					↔ mm
		Ø mm	Ø mm	Ø mm	Ø mm	mm
70 02 125	034025	3.0	2.3	1.5		125
70 02 140	023098	4.0	2.5	1.8		140
70 02 160	034032	4.0	3.0	2.0		160
70 02 180	034049	4.0	3.0	2.5		180
70 06 160	021995		4.0	3.0	2.0	160



1000 V



Clean cutting of thin copper wires,...

also at the cutting edge tips



## KNIPEX X-Cut®

Compact Diagonal Cutters

73

0

Powerful, light and universal

Cuts finest strands as well as multi-core cables and piano wires

- > Box-joint design: highest stability with low weight
- > High cutting performance with minimum effort due to optimum co-ordination of the cutting edge angle and transmission ratio
- > Large opening width for thicker cables
- > Cuts precisely, even through fine copper wires
- > Compact, low-weight construction
- > Doubly supported joint axis for heaviest duty

**40% less force required**

Compared with standard diagonal cutters of the same length.  
With doubly supported joint axis.

Article No.	EAN 4003773-						↔ mm
		Ø mm	Ø mm	Ø mm	Ø mm	Ø mm	mm
73 02 160	075127	4.8	3.8	2.7	2.2	12.0	160
73 05 160	075134	4.8	3.8	2.7	2.2	12.0	160
73 06 160	075141		4.8	3.8	2.7	2.2	160



(PATENTED)



73 02 160

73 05 160

73 06 160

New

Upgraded



25

## High Leverage Diagonal Cutters

74

- > For very tough, continuous use
- > High cutting performance with minimum effort due to optimum co-ordination of the cutting edge angle and transmission ratio
- > Precision cutting edges additionally induction hardened (cutting edge hardness approx. 64 HRC), for all sorts of wire including piano wire
- > Chrome vanadium heavy-duty steel, forged, multi stage oil-hardened









74 02 160



74 02 180



74 06 200

Article No.	EAN 4003773-		 Ø mm	 Ø mm	 Ø mm	 mm
74 02 160	023081		3.4	2.5	2.0	160
74 02 180	023074		3.8	2.7	2.2	180
74 02 200	040309		4.2	3.0	2.5	200
74 02 250	042402		4.6	3.5	3.0	250
74 06 200	033820	 1000 V 	4.2	3.0	2.5	200



## KNIPEX TwinForce® High Performance Diagonal Cutters

73

72

### The superior High Leverage Diagonal Cutter with patented double joint

- > Ideal transmission of force due to double-hinged design
- > Reliably cuts all types of wire, including steel tape
- > For rough or very fine cutting
- > Low cutting impact: gentle on hands. The tension on muscles and tendons is relieved
- > For comfortable cutting, repetitive cutting or extremely hard cutting jobs
- > High degree of stability and zero-backlash due to precisely milled forged-in axles
- > Chrome vanadium heavy-duty steel, forged, oil-hardened






#### 73 72 180 F:

- > With opening spring to simplify reapplication and for repetitive cutting



73 72 180



Article No.	EAN 4003773-	 Ø mm	 Ø mm	 Ø mm	 Ø mm	 mm
73 71 180	074762	5.5	4.6	3.2	3.0	180
73 72 180	074779	5.5	4.6	3.2	3.0	180
73 72 180 F	077657	5.5	4.6	3.2	3.0	180

Extremely easy cutting with little strain: cuts 50 % easier than the tried and tested KNIPEX high leverage diagonal cutters



## KNIPEX CoBolt®

Compact Bolt Cutters

71

Micro-structured cutting edge allows easy cutting of large cross-sections

With gripping surface below the joint for gripping and pulling wires with a diameter as from 1.0 mm

- > Precision cutting edges for soft and hard wire as well as piano wire
- > Cuts bolts, nails, rivets, etc. up to Ø 5.2 mm
- > Most efficient joint design ensures exceptional cutting performance with little effort
- > Cutting edges additionally induction hardened, cutting edge hardness approx. 64 HRC
- > Chrome vanadium heavy-duty steel, forged, multi stage oil-hardened

71 12 200 / 71 22 200 / 71 32 200

- > Opening spring and locking device are integrated in the handles also for comfortable work and protected transport

71 32 200

- > The recess in the blade allows easier cutting of thicker wires, e. g. for anchor bolts in false ceilings










71 01 200



71 01 / 02 / 12 200  
Micro-structured cutting edge

71 01 / 02 / 12 and 71 32 200  
Gripping surface below the joint


Further versions  
from page 14

Article No.	EAN 4003773-		 Ø mm	 Ø mm	 Ø mm	 Ø mm	 mm
71 01 200	033165		6.0	5.2	4.0	3.6	200
71 02 200	047056		6.0	5.2	4.0	3.6	200
71 12 200	066859		6.0	5.2	4.0	3.6	200
71 32 200	066880		6.0	5.2	4.0	3.6	200

## Combination Shears

95

- > For cutting cardboard, plastics, aluminium, brass and copper foils
- > Not suitable for steel wire or iron sheets
- > Precision ground, hardened blades
- > With opening spring and locking device
- > Guard prevents operators' fingers being pinched
- > Adjustable bolted joint

Article No.	EAN 4003773-	 mm
95 05 190	019602	190



## Notching Pliers

90  
6

- > Special pliers for notching recesses into plastic ledges and plastic casings for electric and sanitary installation
- > Notches can be enlarged by initial and final cut
- > Clean cut edges – no trimming activities needed
- > Easy handling
- > With opening spring, opening limiter and locking lever
- > Pliers body: special tool steel, rolled, oil-hardened






Article No.	EAN 4003773-	Capacity mm	 mm
90 61 16	051947	16 x 32	250

## Electricians' Pliers

13  
0

- > The ideal pliers for cable work
- > For gripping and bending wire
- > For cutting medium hard and hard wire
- > Precision cutting edges additionally induction hardened, cutting edge hardness approx. 60 HRC
- > With precision stripping holes
- > For crimping wire ferrules

Article No.	EAN 4003773-	Stripping capacities mm <sup>2</sup>	 Ø mm	 Ø mm	 mm
<b>13 01 160</b>	034971	0.5 – 0.75 / 1.5 / 2.5	2.5	1.6	160
<b>13 02 160</b>	010470	0.5 – 0.75 / 1.5 / 2.5	2.5	1.6	160



13 02 160

## Pliers for Electrical Installation

13

### 6 functions in one pair of pliers

Multifunctional pliers for the electrical installation; to grip flat and round material, for bending, deburring, cutting cable, stripping and crimping wire ferrules

- > Smooth surfaces near the tips grip single cores without damaging them; serrated gripping surfaces and pipe grip for gripping flat and round material
- > Clear-cut outside edge on the jaw for working on flush-mounted junction boxes and deburring feed-through holes
- > Stripping holes for conductors of 0.75 – 1.5 mm<sup>2</sup> and 2.5 mm<sup>2</sup>
- > Crimp die for wire ferrules 0.5 – 2.5 mm<sup>2</sup>
- > Cable shears with (induction-hardened) precision cutting edges for copper and aluminium cables up to 5 x 2.5 mm<sup>2</sup>/Ø 15 mm
- > Slim dimensions for easy access
- > Bolted joint: precise, zero backlash operation of pliers
- > High-grade special tool steel, forged, multi stage oil-hardened

### 13 91 200 / 13 92 200 / 13 96 200

- > The intelligent latching mechanism enables you to «grip» without opening the pliers. The cutting edge remains closed and protected.








**PATENTED**



13 92 200  
MM



13 86 200

Article No.	EAN 4003773-	Grips	Capacity in square		 mm
			 Ø mm	 mm <sup>2</sup>	
<b>13 81 200</b>	075240	plastic coated	15	50	200
<b>13 82 200</b>	075080	multi-component grips	15	50	200
<b>13 86 200</b>	075097	  multi-component grips, VDE-tested	15	50	200
<b>13 91 200</b>	075257	MM plastic coated	15	50	200
<b>13 92 200</b>	075103	MM multi-component grips	15	50	200
<b>13 96 200</b>	075110	  multi-component grips, VDE-tested	15	50	200



## Cable Shears

95


- > For cutting copper and aluminium single conductors as well as multiple stranded cables
- > Not suitable for steel wire and hard drawn copper conductors
- > Precision ground, hardened blades
- > Clean and smooth cut without crushing and deformation
- > Easy cutting with one-hand operation

### 95 26 165

- > Internal opening spring, protected and captive

### 95 41 165

- > Universal stripping area for both solid conductor cross-sections



95 26 165



95 41 165

Article No.	EAN 4003773-		Ø mm	mm <sup>2</sup>	AWG	↔ mm
95 11 165	040323		15	50	1/0	165
95 12 165	029182		15	50	1/0	165
95 16 165	039648	⚡ 1000 V	15	50	1/0	165
95 26 165	069980	⚡ 1000 V	15	50	1/0	165
95 41 165	078609	⚡	12	35	1/0	165



95 26 165

## Cable Shears with twin cutting edge

95

- > For cutting copper and aluminium cables
- > Not suitable for steel wire and hard drawn copper conductors
- > Precision ground, hardened blades
- > Clean and smooth cut without crushing and deformation
- > Easy cutting with one-hand operation
- > Initial and final cut (upper and lower blade) allows cables of up to Ø 20 mm to be cut
- > Low handforce required due to favourable lever ratio and special blade geometry
- > Guard prevents operators' fingers being pinched
- > Adjustable bolted joint, self-retaining screw

Article No.	EAN 4003773-		Ø mm	mm <sup>2</sup>	AWG	↔ mm
95 16 200	026761	⚡ 1000 V	20	70	2/0	200



95 16 200



Initial cut



Final cut


## Self-Adjusting Insulation Strippers

12

- > For single, multiple and fine stranded conductors with plastic or rubber insulation
- > Adapts automatically to the respective cable cross-section; prevents damage to the conductor
- > Cutting depth can be adjusted for different insulation materials
- > With wire cutter for copper and aluminium wires, multiple stranded up to 10 mm<sup>2</sup> and single stranded up to 6 mm<sup>2</sup>
- > Smoothly operating mechanism



Article No.	EAN 4003773-		Stripping capacities		↔ mm
			mm <sup>2</sup>	AWG	
12 40 200	026662	⚡	0.03 – 10	32 – 8	200



### Mode of operation of straight cutters

An incision is made in the red area only.

Not suitable for highly flexible or armoured insulation materials or for multi-layered insulation.



## KNIPEX MultiStrip 10 Automatic Insulation Stripper

12  
42



Stripping without re-adjustment from 0.03 to 10.0 mm<sup>2</sup>  
 Universal blade geometry – robust and more durable  
 Ideal grip design with excellent haptics  
 Recessed wire cutter

- > Fully automatic adjustment to all single-, multi- and fine-stranded conductors with standard insulation throughout the entire capacity range from 0.03 to 10.0 mm<sup>2</sup>
- > No manual fine adjustment necessary
- > No damage to the conductors
- > The clamping jaws made of steel hold the cable in a way that prevents slipping without damaging the remaining insulation
- > With recessed wire cutter for Cu and Al conductors, stranded up to 10 mm<sup>2</sup> and single wire up to 6 mm<sup>2</sup>
- > Particularly smooth-running mechanics and very low weight
- > Replaceable blades block and length stop
- > Handle with soft-plastic zone for a steady grip
- > Body: plastic, fibreglass-reinforced
- > Blade: special tool steel, oil-hardened



PATENTED

Article No.	EAN		Stripping capacities		↔ mm
			mm <sup>2</sup>	AWG	
12 42 195	054580	MM	0.03 – 10	32 – 8	195

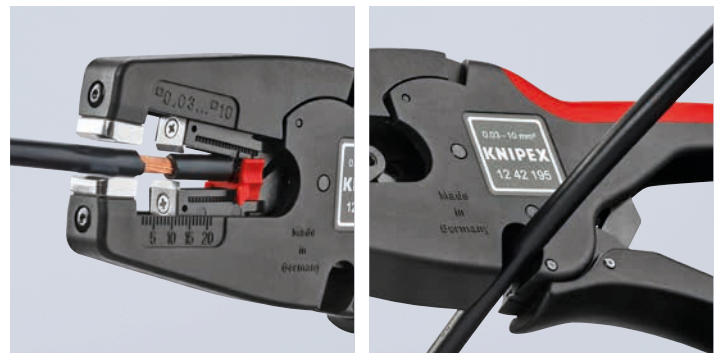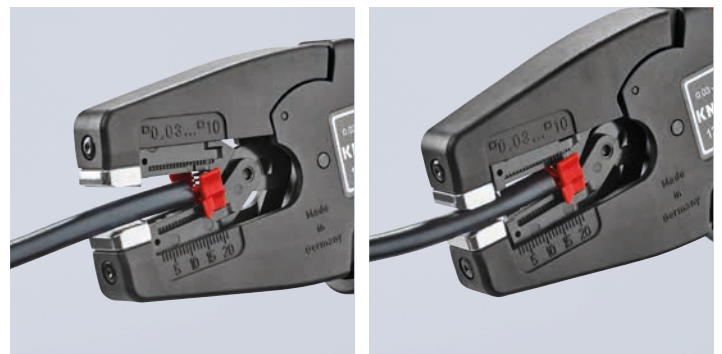

## Automatic Insulation Stripper

12  
62

- > Compact standard tool at a favourable price for all current cable cross-sections and insulating materials
- > For single, multiple and fine stranded cables of 0.2 up to 6 mm<sup>2</sup> with standard insulation
- > Adapts automatically to the respective cable cross-section; prevents damage to the conductor
- > Handy shape and low weight provide high operation comfort
- > Narrow head style for use in confined areas
- > With wire cutter for copper and aluminium wires up to 2.5 mm<sup>2</sup>
- > With adjustable length stop from 6.0 – 18.0 mm for cutting the same stripping lengths during repetitive work
- > Body: plastic, fibreglass-reinforced
- > Blades: special tool steel, oil-hardened, interchangeable

Article No.	EAN		Stripping capacities		↔ mm
			mm <sup>2</sup>	AWG	
12 62 180	054573	MM	0.2 - 6	24 - 10	180





For the reliable and fast cutting of plastic corrugated pipes with the universal capacity range of diameters from 13 to 32 mm  
No damage to the internal cables or pipes

- > Simple insertion, reliable and easy cutting without waste
- > Precise cut without damage thanks to unique arrangement of the cutters with side guide
- > Good accessibility thanks to slim design
- > Made of glass fibre reinforced multi-component plastic with soft gripping zone

**90 22 02 SB**

- > With wire stripping blades for cross-sections of 0.2/0.3/0.8/1.5/2.5/4.0 mm<sup>2</sup>
- > Location ridges (patent pending) on the 1.5 and 2.5 mm<sup>2</sup> wire stripping blades for the fast insertion of cable
- > Internal length scale for consistent stripping of cable, legible for both right and left handed users



Clean cutting edge with no damage to internal cables as the cut is always at the top of the corrugation



90 22 02 SB: Practical locator simplifies the insertion of single conductors for stripping



Also for protective pipes on aluminium composite pipes in plumbing, up to a diameter of 32 mm



Easy to use: press KNIPEX TwistCut® together, turn with slight pressure, done

Article No.	EAN 4003773-	Corrugated pipe cutting Ø mm	Stripping capacities mm <sup>2</sup>	↔ mm
90 22 01 SB	082286	13 - 32	–	100
90 22 02 SB	082293	13 - 32	0.2 - 4.0	100

**KNIPEX ErgoStrip® L**  
Universal Stripping Tool

For the fast and precise stripping of all common round and damp-proof installation cables (e.g. NYM cable 3 x 1.5 mm<sup>2</sup> up to 5 x 2.5 mm<sup>2</sup>), data cable (e.g. twisted pair) and coax cable

Innovative, ergonomic pistol grip design for easy cutting, stripping and longitudinal cut of the sheath

- > Conically slimmed down tool ends for better access in confined areas
- > Stripping device for cross-sections 0.2/0.3/0.8/1.5/2.5/4 mm<sup>2</sup>
- > Simplified insertion of single conductors for wire stripping using locating ridges
- > Easy insertion of coax and data cable thanks to opening aid
- > Multi-component design with a soft plastic zone for comfortable use and a secure grip
- > Housing made from stable glass fibre reinforced plastic



Article No.	EAN 4003773-	MM	Stripping capacities				↔ mm
			round cable Ø mm	conductors and strands mm <sup>2</sup>	data cable	coax cable Ø mm	
16 95 02 SB	082910	MM	8 - 13	0.2 - 4	CAT 5 - 7. Twisted-Pair (UTP/STP)	4.8 - 7.5	135

# KNIPEX ErgoStrip® Universal Stripping Tool

16  
95

For the fast and precise dismantling and stripping of all common round and damp-proof installation cables (e.g. NYM cable 3 x 1.5 mm<sup>2</sup> up to 5 x 2.5 mm<sup>2</sup>), data cable (e.g. twisted pair) and coax cable

Innovative, ergonomic pistol grip design for easy cutting, stripping and longitudinal cut of the sheath

- > Conical, slimmed down tool ends for better access in confined areas
- > Stripping device for cross-sections 0.2/0.3/0.8/1.5/2.5/4 mm<sup>2</sup>
- > Simplified insertion of single wires for stripping using location ridges
- > With opening spring and locking device
- > Easy insertion of coax and data cable thanks to opening aid
- > Multi-component design with a soft plastic zone for comfortable use and a secure grip
- > Housing made from stable glass fibre reinforced plastic




Stripping of the sheath of a NYM cable

Stripping of the insulation of a coax cable

Wire stripping on single conductors



PATENTED

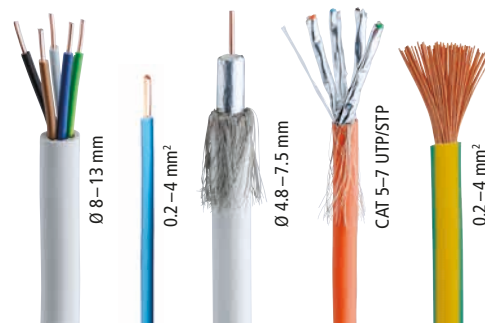

Article No.	EAN 4003773- 079927	Round cable Ø mm	Conductors and strands mm <sup>2</sup>	Stripping capacities		↔ mm
				Data cable	Coax cable Ø mm	
16 95 01 SB		8 - 13	0.2 - 4.0	CAT 5 - 7. Twisted-Pair (UTP/STP)	4.8 - 7.5	135

# Universal Stripping Tools

16

- > For stripping all common round and damp-proof installation cables between Ø 8 - 13 mm (e.g. 3 x 1.5 mm<sup>2</sup> up to 5 x 2.5 mm<sup>2</sup>)
- > Also for use in conduit and distribution boxes
- > Double shell, folding back stripping tool
- > With opening spring and locking device
- > Practical clip for easy transport
- > Body: plastic, fibreglass-reinforced

## 16 85 125 SB:

- > With additional blade for longitudinal cuts
- > Telescopic blade inside
- > Stripping device for cross-sections 0.2/0.3/0.8/1.5/2.5/4 mm<sup>2</sup>
- > With integrated cable guide for longitudinal cut. This enables rigid insulation (e.g. halogen-free) to be stripped more easily

Article No.	EAN 4003773- 040828	Stripping capacities Ø mm	Types of cables	↔ mm
16 80 125 SB		8.0 - 13.0	Round cable, e.g.: 3 x 1.5 mm <sup>2</sup> up to 5 x 2.5 mm <sup>2</sup>	125
16 85 125 SB	060444	8.0 - 13.0	Round cable, e.g.: 3 x 1.5 mm <sup>2</sup> up to 5 x 2.5 mm <sup>2</sup>	125
16 90 130 SB	076940	8.0 - 13.0	Round cable, e.g.: 3 x 1.5 mm <sup>2</sup> up to 5 x 2.5 mm <sup>2</sup>	130



16 80 125 SB



16 85 125 SB



16 90 130 SB



## Crimping Pliers

for wire ferrules

97  
7

Easy crimping due to optimised transmission ratio

Light and slim design

- > For crimping wire ferrules according to DIN 46228 parts 1 + 4 from 0.25 to 16 mm<sup>2</sup>
- > Crimping in marked half-round dies for reliable connections between the sleeve and the conductor
- > 9 particularly deep dies with conical side faces
- > Special tool steel, forged, oil-hardened



97 71 180

Article No.	EAN	4003773-		Capacity		Number of crimping positions	↔ mm
				mm <sup>2</sup>	AWG		
97 71 180	040668			0.25 – 16	24 – 6	9	180
97 78 180	072003			0.25 – 16	24 – 6	9	180

## KNIPEX PreciForce®

Crimping Pliers

97  
5

- > Repetitive, high crimping quality due to precision dies and integral lock (self-releasing mechanism)
- > Crimping pressure has been set precisely (calibrated) in the factory, re-adjustable
- > Optimum transmission of force thanks to toggle lever for fatigue-reduced operation
- > Good handling thanks to favourable handle position, low weight, compact design and ergonomically shaped handles



97 52 33

Article No.	EAN	4003773-	Applications	Capacity		Number of crimping positions	↔ mm
				mm <sup>2</sup>	AWG		
97 52 33	051862		non-insulated crimp terminals, tube and compression cable lugs in accordance with DIN 46234 and DIN 46235 and non-insulated crimp, butt and press connectors in accordance with DIN 46341 and DIN 46267	0.5 – 10	20 – 8	4	220
97 52 36	051893		insulated terminals, plug connectors + butt connectors	0.5 – 6	20 – 10	3	220
97 52 38	051909		insulated and non-insulated wire ferrules	0.25 – 6	24 – 10	5	220

## KNIPEX MultiCrimp®

Crimping Pliers with changer magazine

97

Also for insulated and non-insulated wire ferrules 10 / 16 / 25 mm<sup>2</sup>

Universal indent crimping die for non-insulated connectors

- > Just one tool for the most common crimping applications
- > Crimping dies changed quickly and easily without any additional tool
- > Sorted and protected storage of the interchangeable dies in a round magazine
- > Comfortable, powerful crimping pliers in professional quality
- > Same reliable crimping results as with fixed crimping dies
- > Repetitive, high crimping quality due to precision dies and integral lock (self-releasing mechanism)



PATENTED

97 33 02



Article No.	EAN	4003773-		Applications	Capacity		↔ mm
					mm <sup>2</sup>	AWG	
97 33 02	066934			KNIPEX MultiCrimp®			250
				non-insulated open plug type connectors (plug width 4.8 + 6.3 mm)	0.5 – 6	20 – 10	
				insulated terminals, plug connectors + butt connectors	0.5 – 6	20 – 10	
				wire ferrules	0.5 – 6	24 – 10	
				wire ferrules	10 / 16 / 25	8 / 6 / 4	
				non-insulated crimp terminals, tube and compression cable lugs in accordance with DIN 46234 and DIN 46235 and non-insulated crimp, butt and press connectors in accordance with DIN 46341 and DIN 46267	0.5 – 10	20 – 8	

# Self-Adjusting Crimping Pliers for wire ferrules

with lateral access

97  
53

Square compression now additionally also for wire ferrules up to 16 mm<sup>2</sup>

- > Suitable in particular for all twin wire ferrules up to 2 x 4 mm<sup>2</sup> or 2 x AWG 12
- > Square compression for ideal contact surfaces in the clamp connection



Crimping capacity can be switched over simply from 10 mm<sup>2</sup> to 16 mm<sup>2</sup>.

**The small crimping pliers for wire ferrules with two major advantages for the user:**

- > Automatic adjustment to the end sleeves used: This makes work easier for the professional and offers reliable and fast crimping.
- > Expanded range of applications




97 53 04



0.08 - 10 mm<sup>2</sup> + 16 mm<sup>2</sup>

PATENTED

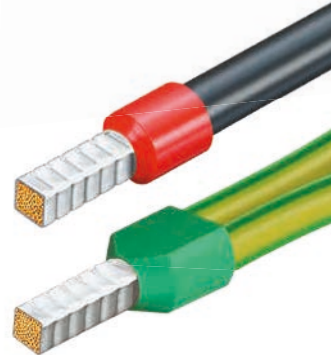

Square compression

## Proven functions

- > For crimping wire ferrules according to DIN 46228 parts 1 + 4
- > Self-adjusting adaptation to the desired wire ferrules size: no wrong crimps caused by using the wrong die
- > Repetitive, high crimping quality due to integral lock (self-releasing mechanism)
- > Tools have been set precisely (calibrated) in the factory
- > Optimum transmission of force thanks to toggle lever for fatigue-reduced operation
- > Handy shape and low weight provide high operation comfort

## Expanded capacity of hexagonal crimping up to 10 mm<sup>2</sup>

- > Suitable in particular for all twin wire ferrules up to 2 x 4 mm<sup>2</sup> or 2 x AWG 12
- > Hexagonal compression for confined connection dimensions




97 53 14



0.08 - 10 mm<sup>2</sup>

PATENTED



Hexagonal compression

Article No.	EAN			Pliers	Handles	Application	Capacity mm <sup>2</sup>	AWG	↔ mm
97 53 04	028017			burnished	with multi-component grips	wire ferrules	0.08 - 10 + 16	28 - 6	180
97 53 14	041474			burnished	with multi-component grips	wire ferrules	0.08 - 10	28 - 8	180



**KNIPEX L-BOXX® Plumbing, 52 parts**

- > Equipped with 52 brand name quality tools, some VDE tested according to DIN EN 60900
- > Several boxes can be securely joined together
- > With two-part tool holder made of hard-wearing polyester fabric
- > Tool holders are connected to each other using hook-and-loop
- > Handle can be lowered into a hollow in the lid to save space
- > Dimensions, exterior (W x H x D): 442 x 151 x 357 mm; dimensions, interior (W x H x D): 375 x 107 x 311 mm
- > Strong box made of impact- and shock-proof ABS plastic

Article No.	EAN 4003773-	Content
<b>00 21 19 LB S</b>	081630	1 x 00 11 01 / 1 x 26 16 200 / 1 x 74 06 180 1 x 86 03 250 / 1 x 87 01 250 / 1 x 87 01 400 1 x 98 20 35 / 1 x 98 20 55 / 1 x 98 26 15 1 x 98 26 20 / 1 x 98 26 25 / 1 x 98 24 01 1 x 98 24 02 /
<b>00 21 19 LB</b>	081616	KNIPEX L-BOXX®, empty
<b>00 21 19 LB WK</b>	081609	KNIPEX L-BOXX®, Two-part tool holder



00 21 19 LB S

**Plumber's tool case, 52 parts**

- > Equipped with 52 brand name quality tools, some VDE tested according to DIN EN 60900
- > For extensive plumbing and installation work
- > Dimensions, exterior (W x H x D): 470 x 340 x 195 mm;

Article No.	EAN 4003773-	Content
<b>00 21 21 HK S</b>	080671	1 x 86 03 250 / 1 x 87 01 250 / 1 x 87 01 400 1 x 74 06 180 / 1 x 26 16 200 / 1 x 00 11 01



00 21 21 HK S

**Tool Case "BIG Twin" und "Big Twin Move" empty**

- > Heavy duty ABS material, black
- > 30 kg maximum load
- > Removable document compartment and removable tool board

Article No.	EAN 4003773-	Content
<b>00 21 41 LE</b>	071549	Tool Case "BIG Twin-Move" with integrated rollers and telescopic handle, empty
<b>00 21 42 LE</b>	057673	Tool Case „BIG Twin“ empty

**Now revised**



00 21 41 LE



00 21 42 LE

**Tool Bag "New Classic Basic"**

Article No.	EAN 4003773-	Content
<b>00 21 02 LE</b>	057499	without tools

**Tool Case "Basic"**

Artikel-Nr.	EAN 4003773-	Content
<b>00 21 05 LE</b>	056904	without tools



00 21 02 LE




00 21 05 LE


# PLIERS ABC – TECHNICAL BASICS

## BASIC SHAPES OF THE JAWS


flat jaws



half-round jaws



round jaws




**Cutting Pliers**  
for cutting or nipping (diagonal, centre and end cutters, carpenters' pincers etc.)




**Gripping Pliers**  
(flat-, long-nose and water pump pliers etc.)


## JOINT CONNECTIONS



**Forged-in joint axle**  
The rivet is part of one handle (forged from one piece)  
> high stability for highest strain  
> long service life



**Joint with inserted rivet**  
A proved, sturdy and precise rivet connection for all standard pliers.



**Bolted joint**  
For particularly demanding requirements in terms of precision and smooth operation, e.g. in circlip pliers and cable shears (even the finest multi-stranded conductors have to be cut cleanly).



**Combined Pliers**  
for cutting and gripping (combination, stork beak and radio pliers etc.)




**Special Pliers**  
for special applications, e.g. notching or punching different types of materials (sheet-metal nibbler, tile nibbling pincers etc.)

## TYPES OF JOINTS


### Lap joint

The two plier halves lie on top of each other but are not milled out.





### Single joint

Half the thickness in each pliers handle is milled away in the joint area so that both handles can be laid into each other.



### Box joint


One handle on the pliers is slit. The other handle is pushed through this slot. This joint connection can withstand a high level of load and strain because the joint bolt is supported on both sides and the inside handle is guided on both sides.

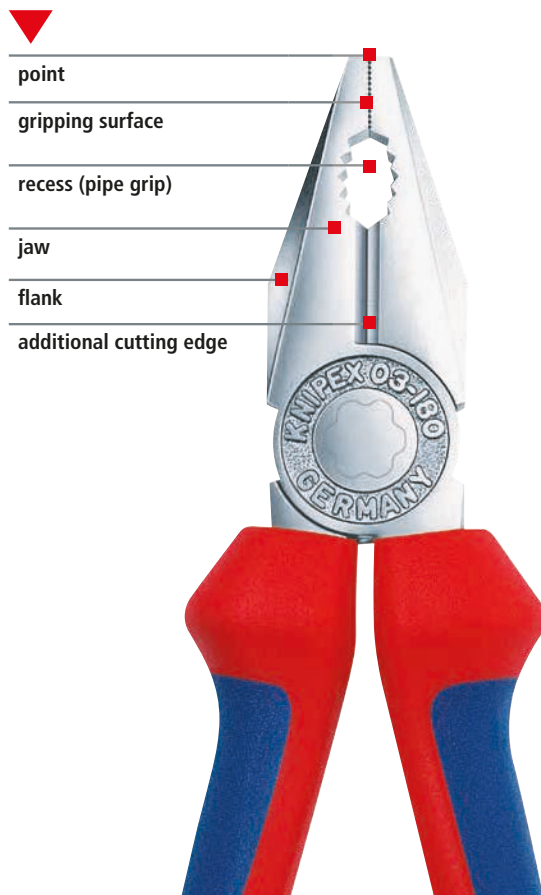




# CUTTING EDGE – TECHNICAL BASICS

## Direction and position of cutting edges

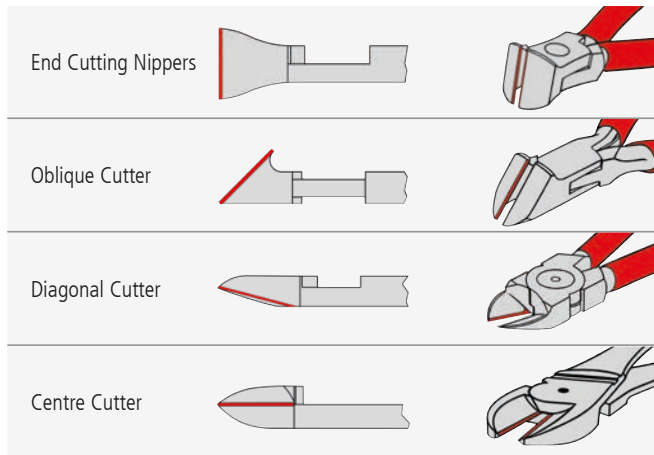


## Cutting edge shapes DIN ISO 5742

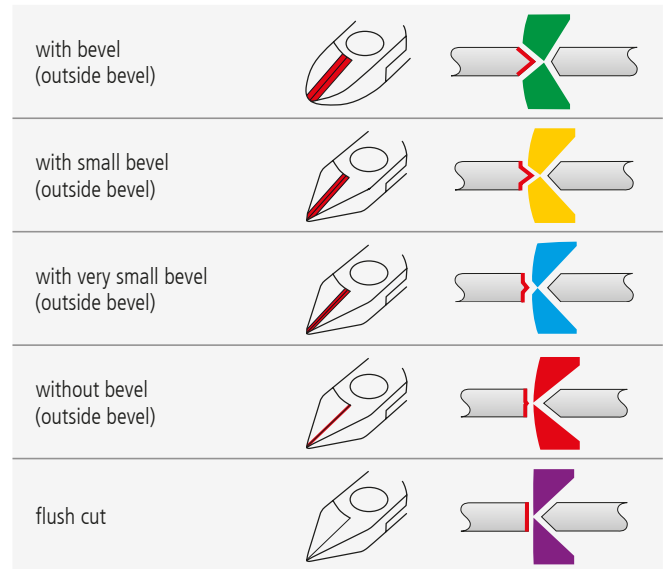

## WIRE CLASSES

	Material examples	Type of wire	Tensile strength	
			N/mm <sup>2</sup>	kp/mm <sup>2</sup>
	Copper, plastics	soft	220	22
	Nail, wire pin	medium-hard	750	75
	Wire rope strand, steel wire	hard	1800	180
	Spring steel wire	piano wire	2300	230

The maximum values indicated always stay for the performance cutting conditions, when the wire is placed as near as possible to the joint.

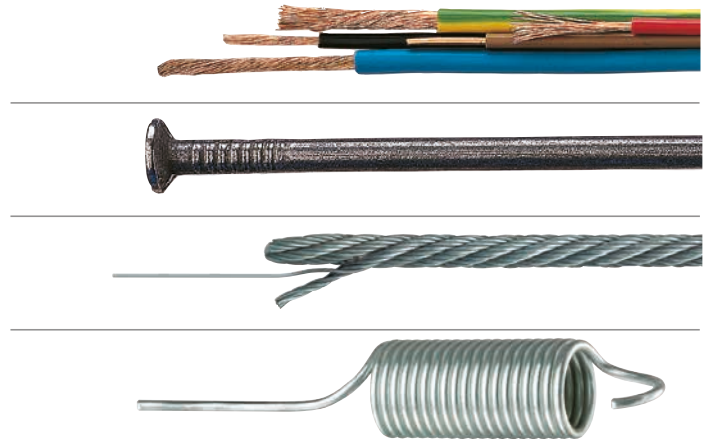

## Safety instructions

- > Each tool should only be used for its specified purpose.
- > When using cutting pliers: beware of wire ends flying off. Wear protective goggles and – if needed – gloves. Be aware of bystanders.
- > Only handles marked with the symbol are insulated.




## Care Tips

A drop of oil on polished surfaces and in the joint will keep the tool in good working order and will increase the service life of your pliers.

# STRUCTURE OF ARTICLE NUMBER

# HEAD/HANDLES

Basic model e. g. KNIPEX Cobra® Hightech Water Pump Pliers	Form e. g. straight	Finish e. g. head polished, handles with mul- ti-compo- nent grips	Length e. g. 250 mm	Accessory e. g. Tethered Tools range
<b>87</b>	<b>0</b>	<b>2</b>	<b>250</b>	<b>T</b>

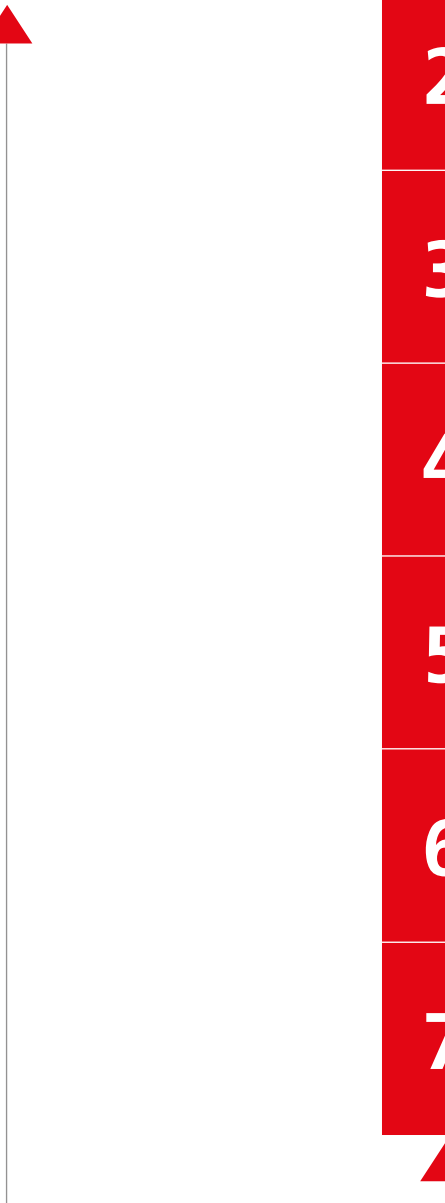

**0**

Pliers black  
atramentized,  
head polished



**1**

Head polished,  
handles plastic coated



**2**

Head polished,  
handles with  
multi-component grips



**3**

Pliers chrome plated,  
handles plastic  
coated



**4**

Pliers chrome plated



**5**

Pliers chrome plated,  
handles with multi-  
component grips



**6**

Pliers chrome plated,  
handles insulated with  
multi-component grips,  
VDE-tested



DIN EN 60900 / IEC 60900   1000 V

**7**

Pliers chrome plated,  
handles with dipped  
insulation,  
VDE-tested



DIN EN 60900 / IEC 60900   1000 V



# INDEX

## New Products 2020

KNIPEX TubiX® .....	4	Electricians' Pliers.....	28
KNIPEX Cobra® XS .....	6	Pliers for Electrical Installation .....	28
Pliers Wrench – 300 mm length .....	8	Cable Shears.....	29
KNIPEX PreciStrip16 .....	10	Cable Shears with twin cutting edge.....	29
KNIPEX StepCut .....	12	Self-Adjusting Insulation Strippers .....	29
KNIPEX CoBolt® S – with recess .....	14	KNIPEX MultiStrip 10 Automatic Insulation Stripper .....	30
Pipe Cutter for plastic composite pipes .....	15	Automatic Insulation Stripper .....	30
Pipe Cutter for multilayer and pneumatic hoses.....	15	KNIPEX TwistCut® .....	31
Tool Case "BIG Basic Move", Plumbing .....	16	KNIPEX ErgoStrip® Universal Stripping Tool .....	31/32
		Universal Stripping Tool .....	32
Pliers Wrenches .....	17	Crimping Pliers .....	33
KNIPEX Cobra® .....	18	KNIPEX PreciForce® .....	33
KNIPEX Mini pliers sets .....	18	KNIPEX MultiCrimp® Crimping Pliers with changer magazine .....	33
Tool Kits.....	18	Self-Adjusting Crimping Pliers for wire ferrules.....	34
KNIPEX Cobra® QuickSet .....	19	Tool Kits.....	35
Multiple Slip Joint Spanner .....	19		
KNIPEX Cobra® ES.....	19		
KNIPEX SmartGrip® .....	19		
Siphon- and Connector Pliers.....	20		
KNIPEX Alligator®.....	20		
Pipe Wrenches 90° .....	21		
Pipe Wrenches S-Type.....	21		
Pipe Wrenches 45° .....	21		
Pipe Wrenches S-Type with fast adjustment.....	21		
KNIPEX TwinKey® .....	22		
Pipe Cutter .....	22/23		
Tile Breaking Pliers .....	23		
Needle-Nose Combination Pliers.....	24		
Combination Pliers .....	24		
High Leverage Combination Pliers.....	24		
Diagonal Cutters .....	25		
KNIPEX X-Cut® .....	25		
High Leverage Diagonal Cutters.....	26		
KNIPEX TwinForce® .....	26		
KNIPEX CoBolt® .....	27		
Combination Shears .....	27		
Notching Pliers.....	27		

It is not permissible to copy the catalogue or parts of it in any way without our approval.

Subject to model modifications and technical changes. Illustrations, dimensions and weights are just approximate.

No liability is assumed for misprints or errors. Printed in the Federal Republic of Germany.

KNIPEX-Werk C. Gustav Putsch KG


**KNIPEX-Werk**  
**C. Gustav Putsch KG**

42337 Wuppertal  
Germany

Tel.: +49 202 47 94-0  
Fax: +49 202 47 74 94

info@knipex.com  
www.knipex.com

Follow us on:   



Your dealer

